


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
1			STANDARD RUST-PROOF	2000	2100	ABSENT				X		
		2	STANDARD RUST-PROOF	2000	2100	ABSENT				X		
		3 4	STANDARD ALUMINIUM COVERING	2000	2100	PANORAMIC	TRANSPARENT			X		


C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

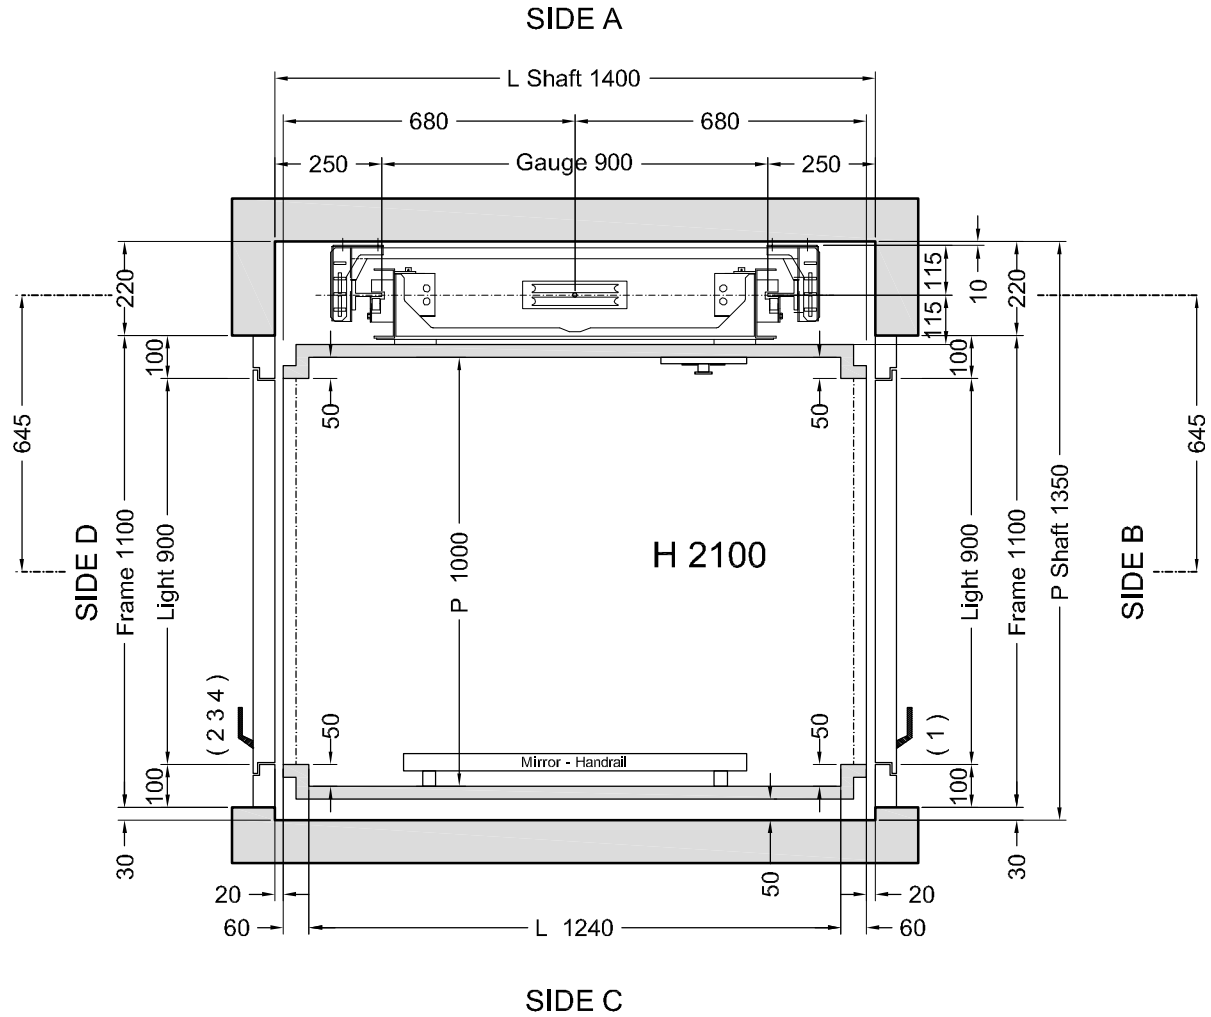


**Stops: 4 - Doors: 4**

Shaft on **MASONRY (MURATURA)**

	VERSIONS	Description	Designer	Date	<b>Disegno Definitivo</b>
		Varie Modifiche.	L. Del Bianco	26/06/2009	
		Disegno Definitivo	L. Del Bianco	26/06/09	1° STESURA
		CAPACITY	350 Kg	AREA m <sup>2</sup>	1,24
				CAPACITY	



**EP**  
Elevatori Premontati




**Eifo**

SHEET 1/2  
SHEET DIMENS. A3  
SCALE 1:12.5

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Pompa a mano
- Pressostato
- Doppia velocità
- Manovra Automatica
- Arcata rinforzata
- Maniglie CASPIM
- Fotocellula tutta parete

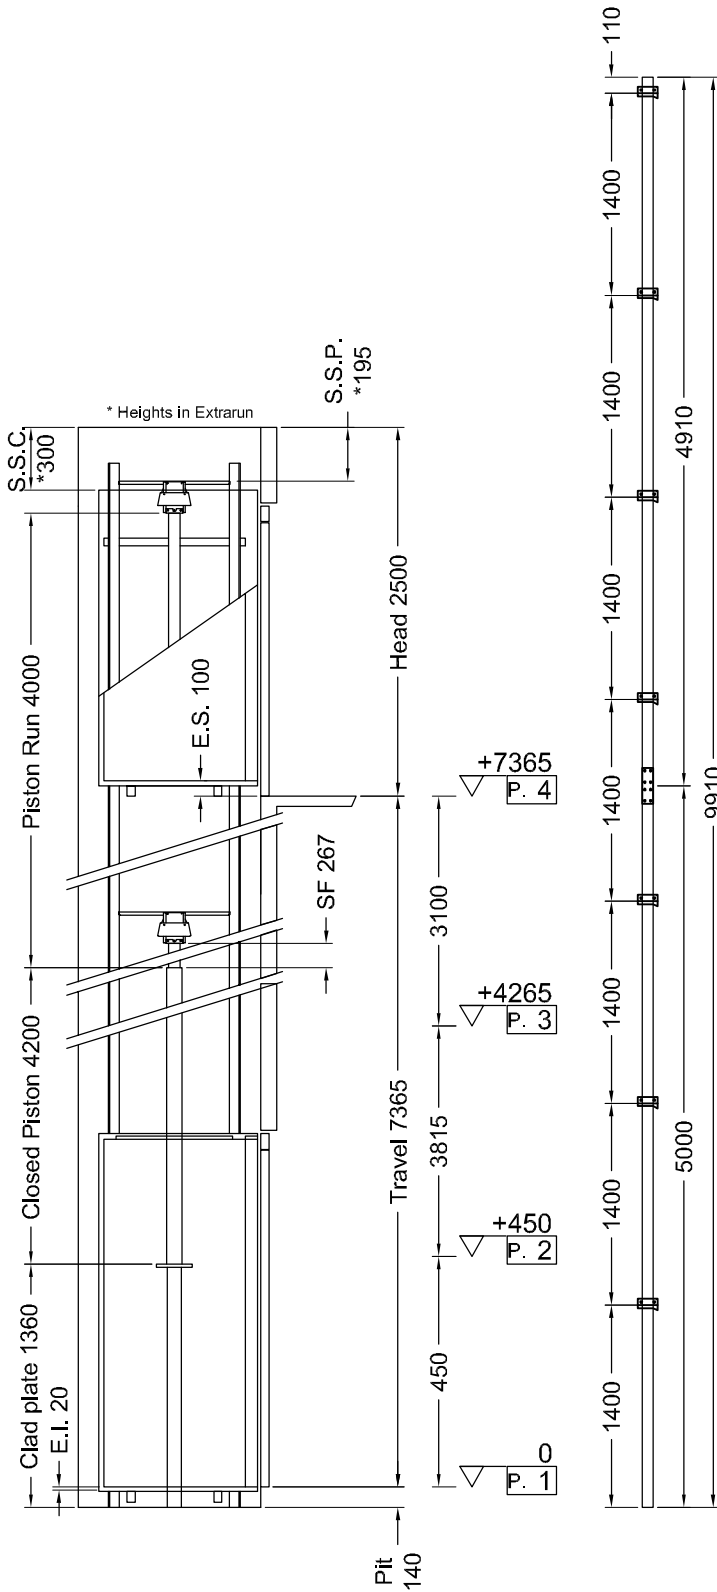

<b>Indirect Installation</b>		Speed <b>0,3 m/s</b>	26/06/09 14.36	(V.020)	
THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	<b>10025</b>	P	(N)	658
N	(N)	<b>889</b>	N	(N)	6915
F1	(N)	<b>1358</b>	F1	(N)	2263
F2	(N)	<b>360</b>	F2	(N)	600
SPACES			PRESSURES		
E.I.	Extrarun below cabin	(mm) <b>20</b>	Max static pressure	(bar) <b>33,37</b>	
E.S.	Extrarun above cabin	(mm) <b>100</b>	Min static pressure	(bar) <b>15,53</b>	
SF.	Piston extraction	(mm) <b>267</b>	Overpressure limit	(bar) <b>46,72</b>	
S.S.P.	Piston/head	(mm) <b>195</b>	Residual pressure	(bar) <b>1,71</b>	
S.S.C.	Cabin/head	(mm) <b>300</b>			
HYDRAULIC UNIT			MECHANICAL PARTS		
Central unit	<b>Start 96SLE</b>		Runners	<b>T70-2A</b>	
Capacity (l/min)	<b>35</b>		Brackets	(Nr) <b>7</b>	
Motor (V)	<b>MF220V</b>		Cables	<b>9 mm 6-(1+9+9)</b>	
Power (Kw)	<b>3</b>		Cables lenght (mm) 2 x	<b>12400</b>	
Piston	<b>Start Elevator(ø) 70x5x4000</b>		Min actual breaking load (N)	<b>42100</b>	
Opt. oil position	<b>basso</b>				
Tubing	<b>Start</b>				
Tubing lenght (mm)	<b>7000</b>				
Min hydraulic oil (L)	<b>55</b>				
SECURITY DEVICES		Manufacturer	Model	Certificate	
Safety Gear		<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>	
Block Valve		<b>Start</b>	<b>1/2"03026/01;03026/02</b>	<b>IMQ CA50.00526</b>	
Key Locks		<b>TIEFFE</b>	<b>TIEFFE2000</b>	<b>IMQ I0110</b>	
MACHINERY LOCATION					
At floor	<b>1</b>	Away from shaft	(mm)	<b>2500</b>	
Cables enter in shaft: Side	<b>A</b>				
CABIN		CABIN ACCESSORIES			
Panels	<b>Blu B22SMA</b>	Handrail	<b>INOX S.B.,LatI C</b>		
Finishes	<b>Inox Scotch Brite</b>	Mirror	<b>LatI C</b>		
Oper. panel	<b>A COLONNA</b>				
Floor	<b>ROCK SOLID 673</b>				
Roof	<b>FARETTI-Inox Scotch Brite</b>				
OTHER ACCESSORIES					
<ul style="list-style-type: none"> <li>Enabling key for the cabin button pad, double Insertion</li> <li>Manual pump</li> <li>Manostat</li> <li>Double speed</li> <li>Automatic control</li> <li>Reinforced arcade</li> <li>Handles CASPIM</li> <li>Full height Infra-red curtain</li> </ul>					

LE INFORMAZIONI CONTENUTE NEL PRESENTE DISEGNO SONO INTEGRATE DAL MANUALE OPERE MURARIE.



Disegno Definitivo	1° STESURA
L. Del Bianco	26/06/09
<b>Disegno Definitivo</b>	
SCALE	SHEET
OUT OF SCALE	2/2