


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
5		1 2 3 4	Standard Rust-proof - (No raised edges)	2000	2100	Absent				X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

**Automatic Control 2010**  
0,30 m/s

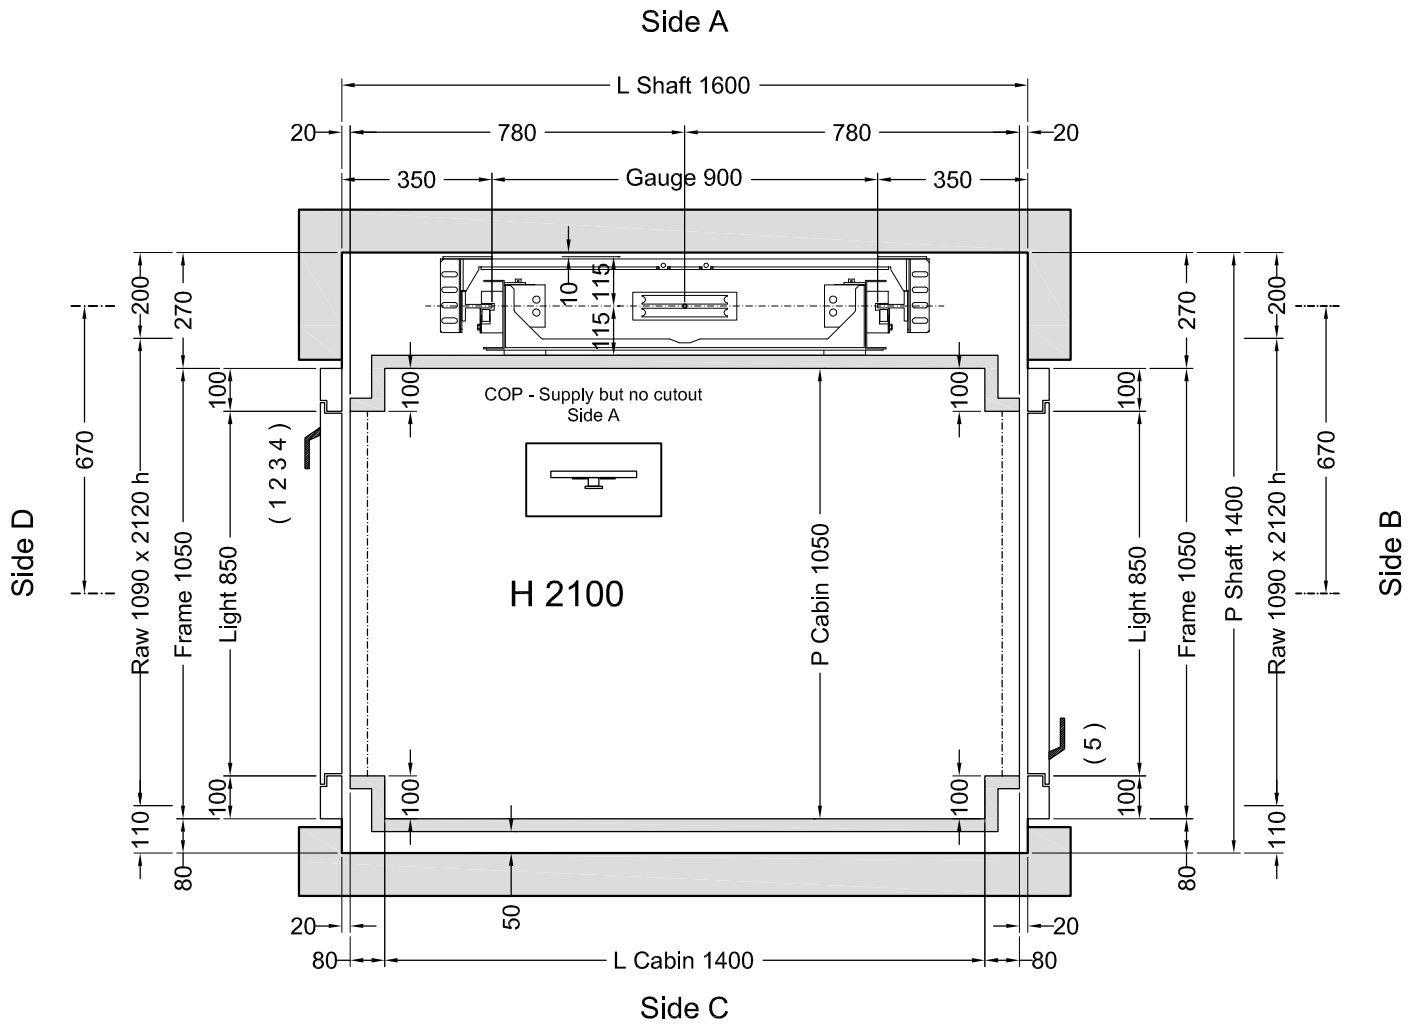

**Stops: 5 - Doors: 5**


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1460 (L) x 1050 (P)** thks **15 mm** Weight: **26 kg**

	VERSIONS	Description	Designer	Date	Final Design Drawings
		Porte senza maniglie e fori; Parete Lato A senza scasso; Pulsantera in fornitura.	L.Del Bianco	18/12/2012	
Varie modifiche.	L.Del Bianco	21/11/2012			
Correzione come da rilievi.	L.Del Bianco	15/11/2011			
		Final Design Drawings L.Del Bianco	1° STESURA 14/11/11		SHEET <b>1/2</b> SHEET DIMENS. <b>A3</b> SCALE <b>1:12.5</b>
		CAPACITY <b>350 Kg</b>	AREA m <sup>2</sup> <b>1,47</b>	CAPACITY	

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pistone In due pezzi
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Arcata rinforzata
- Maniglie porte escluse dalla fornitura
- Telefono
- Fotocellula tutta parete
- Comando automatico al pian

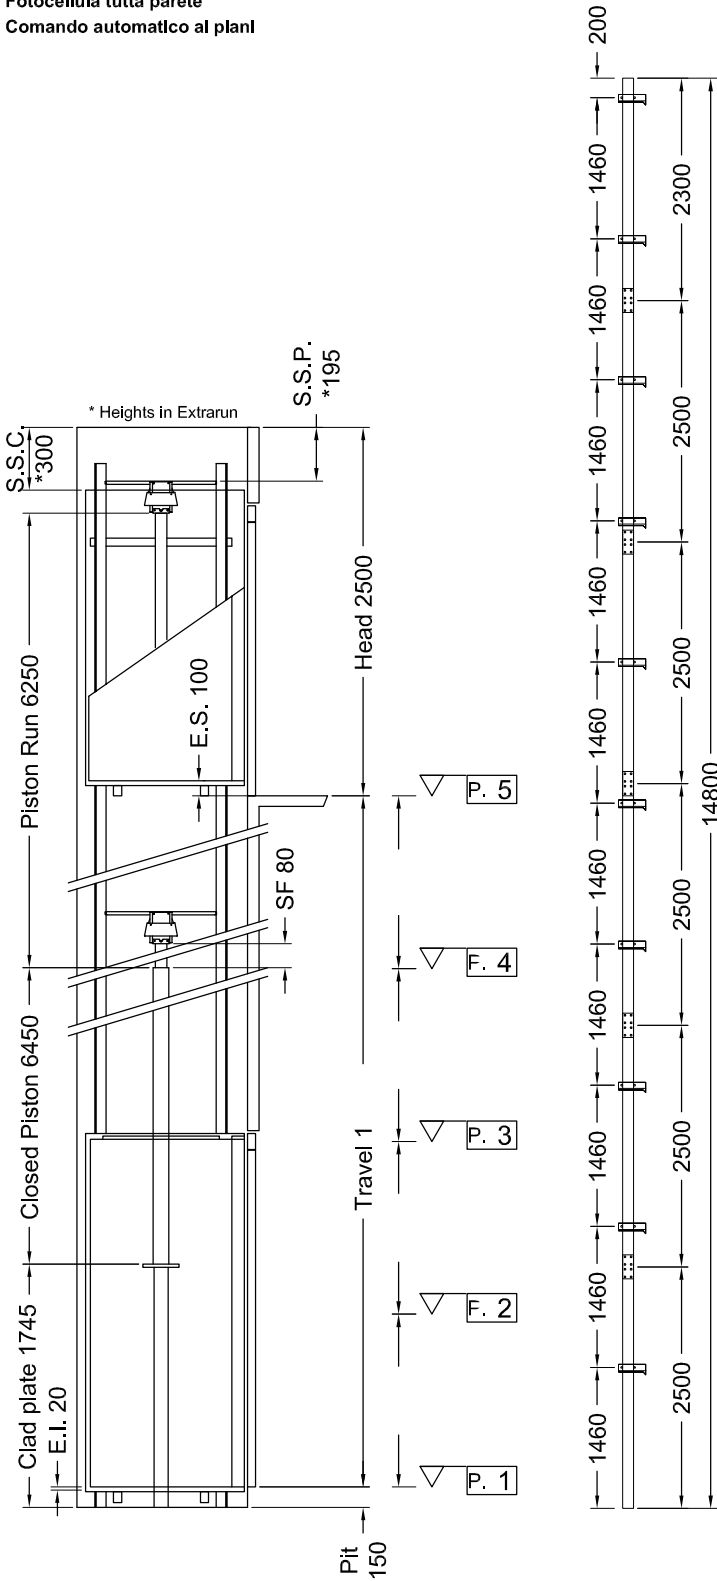

<b>Indirect Installation</b>		Speed <b>0,28 m/s</b>	18/12/12 14.33 (V.2761)		
THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12248	P	(N)	1166
N	(N)	1325	N	(N)	8324
F1	(N)	1623	F1	(N)	2704
F2	(N)	434	F2	(N)	723



MACHINERY LOCATION			
At floor	1	Length of the hose travel	1000 (mm)
Cables enter in shaft: Side	A		

CABIN	CABIN ACCESSORIES
Panels	Lamiera zincata
Finishes	Inox Scotch Brite
Oper. panel	VERTICAL (No cutout side A)
Floor	By Customer
Roof	SPOTS LED - Blanco A1

OTHER ACCESSORIES
<ul style="list-style-type: none"> <li>Enabling key for the cabin button pad, double insertion</li> <li>Guides dlmension 2.5 m</li> <li>Piston In 2 pcs</li> <li>Manual pump</li> <li>Manostat with overweight signal</li> <li>Double speed</li> <li>Reinforced arcade</li> <li><u>Doors without handles (and without holes for handles)</u></li> <li>Telephone</li> <li>Full height Infra-red curtain</li> <li>Automatic call to floors</li> </ul>

The approval of this plan serves also as confirmation of delivery of the masonry manual rev.3.