


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
B 1 2			2 Panels Inox BA mecc.	2000	2100	Inox BA mecc.	Panoramic	Transparent	C2
		B G	2 Panels Inox BA mecc.	2000	2100	Inox BA mecc.	Panoramic	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad


At B floor both doors open simultaneously

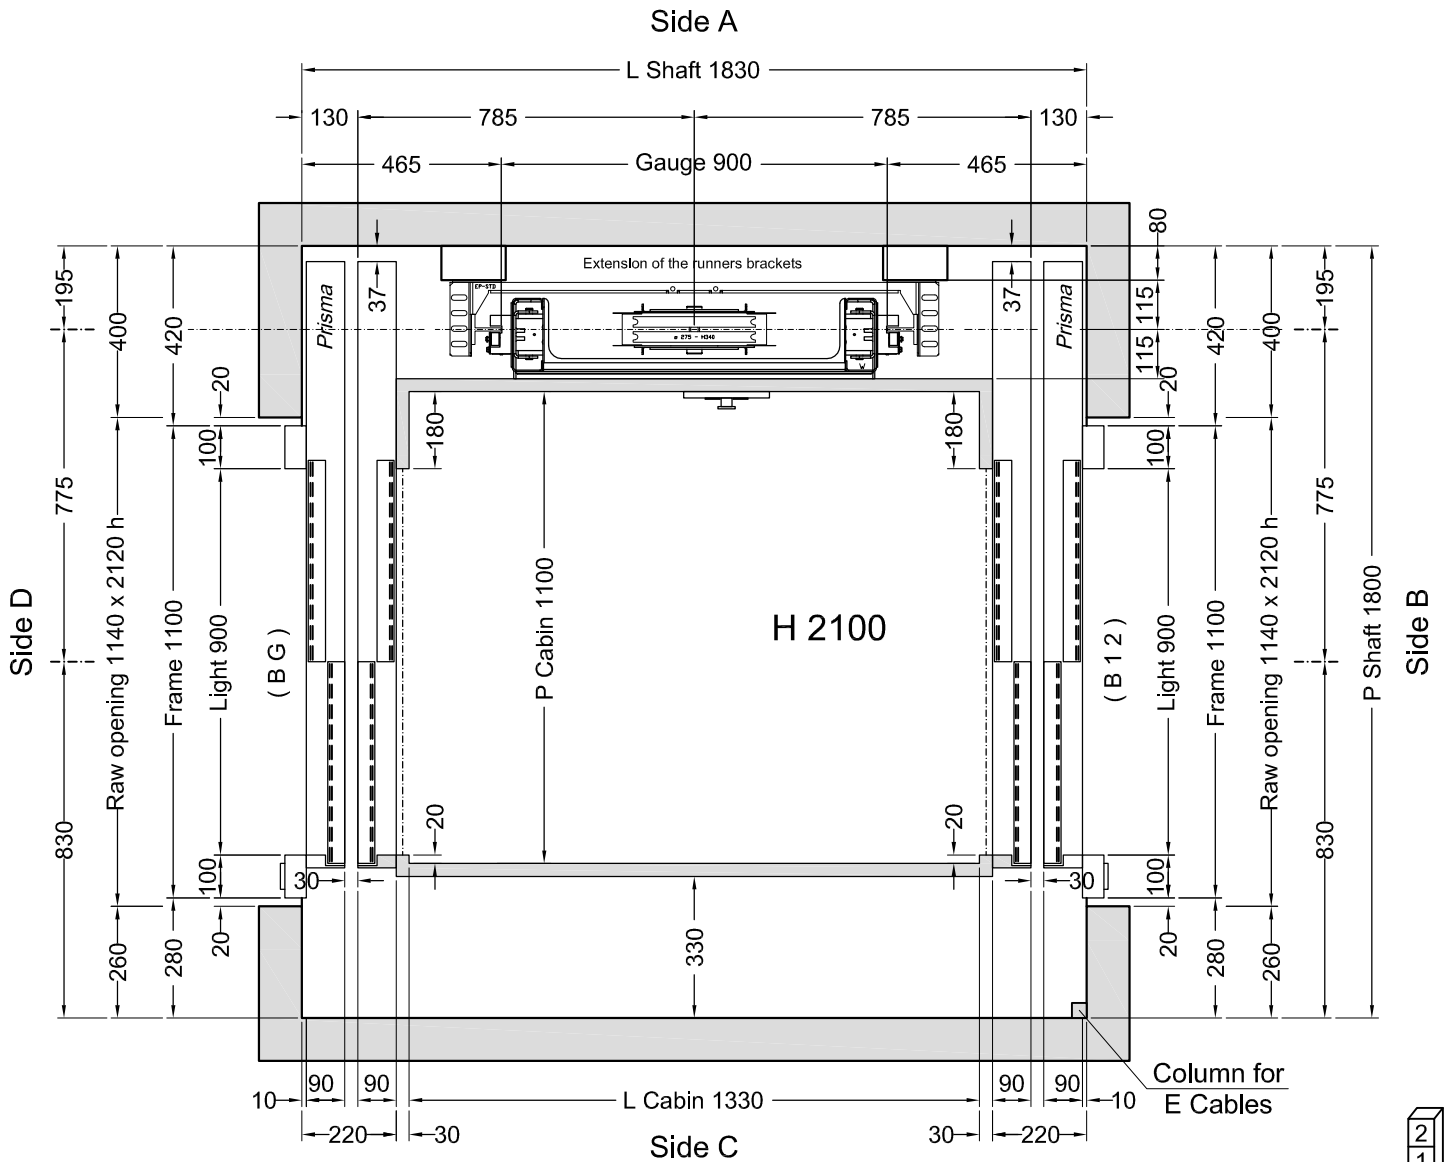

Stops: 4 - Doors: 5

Shaft in **Masonry (Muratura)**


Customer own flooring: Dimensions **1390 (L) x 1100 (P)** thks **10 mm** Weight: **26 kg**



		Designer	Date	Rev. Final Drawings	
		L. Del Bianco	22/11/2013	Model	SHEET
		Colamarino	14/11/2013	ELFO 2	1/2
		D.Ogliastro	08/07/2013		SHEET DIMENS.
		Final Drawings	1° STESURA		A3
		L. Del Bianco	15/11/13		SCALE
		CAPACITY	AREA m ²	CAPACITY	1:12.5
		350 kg	1,47		

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno piano basso con tempo regolabile
- Dispositivo falsa testata
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011
- Pulsantiera cabina con pulsante apriporta
- Apertura porte simultanea al Piano B
- Porte Prisma
- Pulsanti: B, G, 1, 2

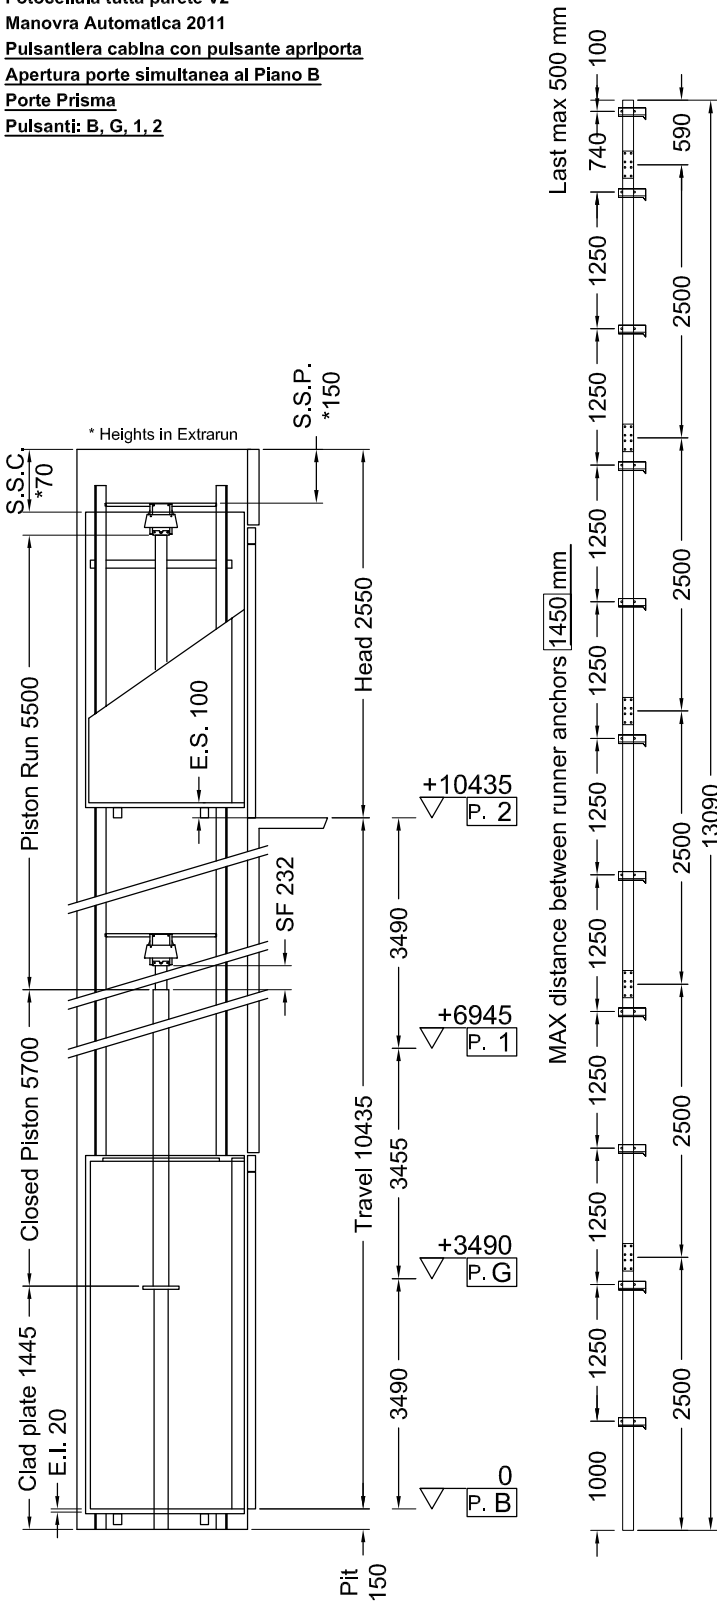

Indirect Installation	Speed 0,28 m/s	25/11/13 12.02 (V.2830)
-----------------------	----------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	14313	P	(N)	891
N	(N)	1168	N	(N)	9819
F1	(N)	1758	F1	(N)	2930
F2	(N)	347	F2	(N)	578

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	35,99
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	22,33
SF.	Piston extraction (mm)	232	Overpressure limit (bar)	50,38
S.S.P.	Piston/head (mm)	150	Residual pressure (bar)	1,77
S.S.C.	Cabin/head (mm)	70		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	43	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 11
Power (Kw)	2,9	Cables	Ø 11 mm 6-(1+9+9)
Corrente (A)	19	Cables length (mm) 2 x	16000
Piston	START SL (Ø) 80x5x5500	Min actual breaking load (N)	70700
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD 3/4"		
Tubing length (mm)	11000		
Min hydraulic oil (L)	70		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0326	CA50.00526
Key Locks	PRISMA	SERIE Q	

MACHINERY LOCATION			
At floor	B	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN	CABIN ACCESSORIES
Panels	Galvanized sheet
Finishes	Inox BA mecc.
Oper. panel	VERTICAL (Like finishes)
Floor	By Customer
Roof	LABIRINT - Inox BA mecc.
Cabin Doors	
	Side B: 2-Panels Automatic Sliding doors, Transparent Glass and Inox BA mecc.
	Side D: 2-Panels Automatic Sliding doors, Transparent Glass and Inox BA mecc.

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - Return to the lower floor after adjustable time
 - False head device
 - Telephone by Lift Shop
 - Full height infra-red curtain V2
 - Automatic control 2011
 - Door Open Button on C.O.P.
 - At B floor both doors open simultaneously
 - Prisma doors
 - Buttons: B, G, 1, 2

