


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	1 2 3		Standard RAL 9004	2000	2100	RAL 9004	Panoramic	Transparent	

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Shaft V66 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	RAL 9004	See pages 3 and 4	Pit bottom	For Inside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	RAL 9004	Vedi Pag. 3 e 4	Fondo Fossa	Per interno	

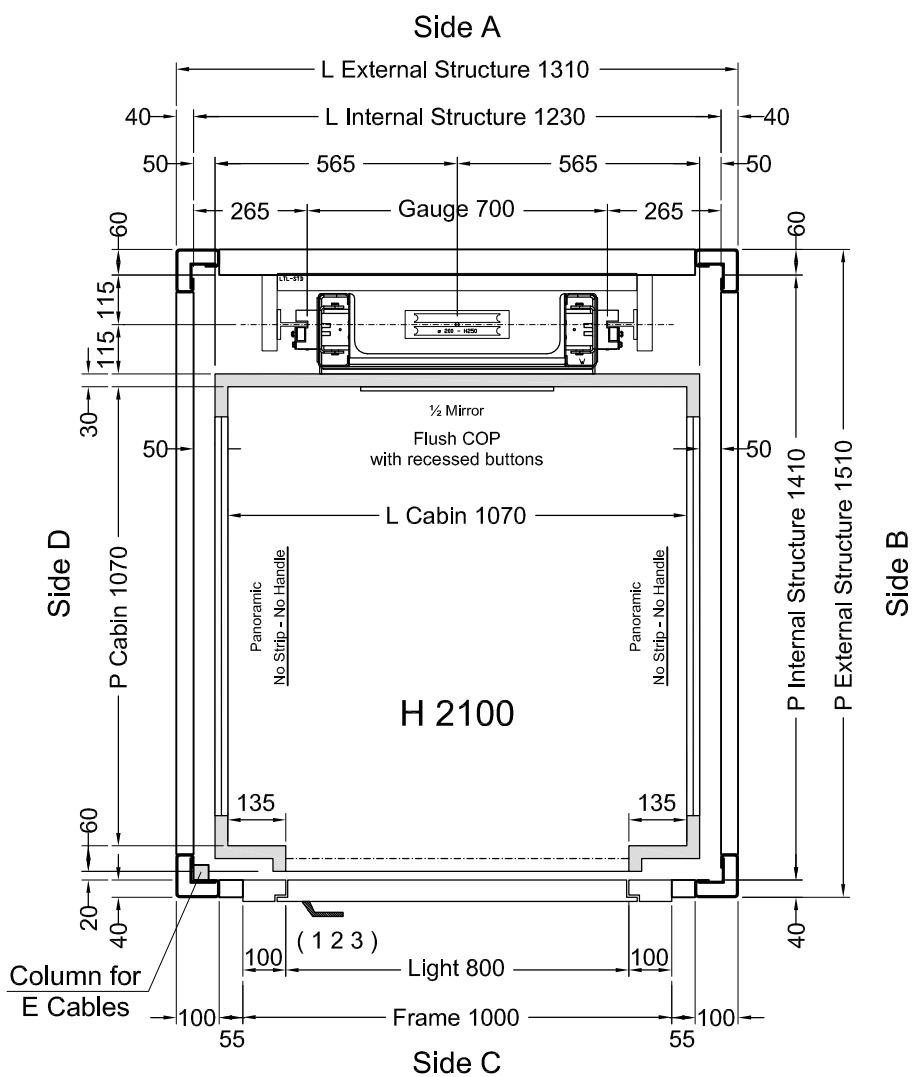


Feasibility n° 2051 - Ceiling

Stops: 3 - Doors: 3


Shaft in **Shaft V66 ()**

Customer own flooring: Dimensions **1070 (L) x 1100 (P)** thks **15 mm** Weight: **50 kg**

		Designer	Date	Final Drawings	
				Model	SHEET
				ELFO	1/4
		D.Ogliastro	01/08/2014		SHEET DIMENS.
		Final Drawings L. Del Bianco	1° STESURA 27/08/14		SCALE
		CAPACITY	AREA m ²	CAPACITY	
		300 kg	1,15		1:12.5

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Parte meccanica verniciata RAL 1003
- Gulde In barre da 2,5 m
- Pistone verniciato RAL 1003
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011

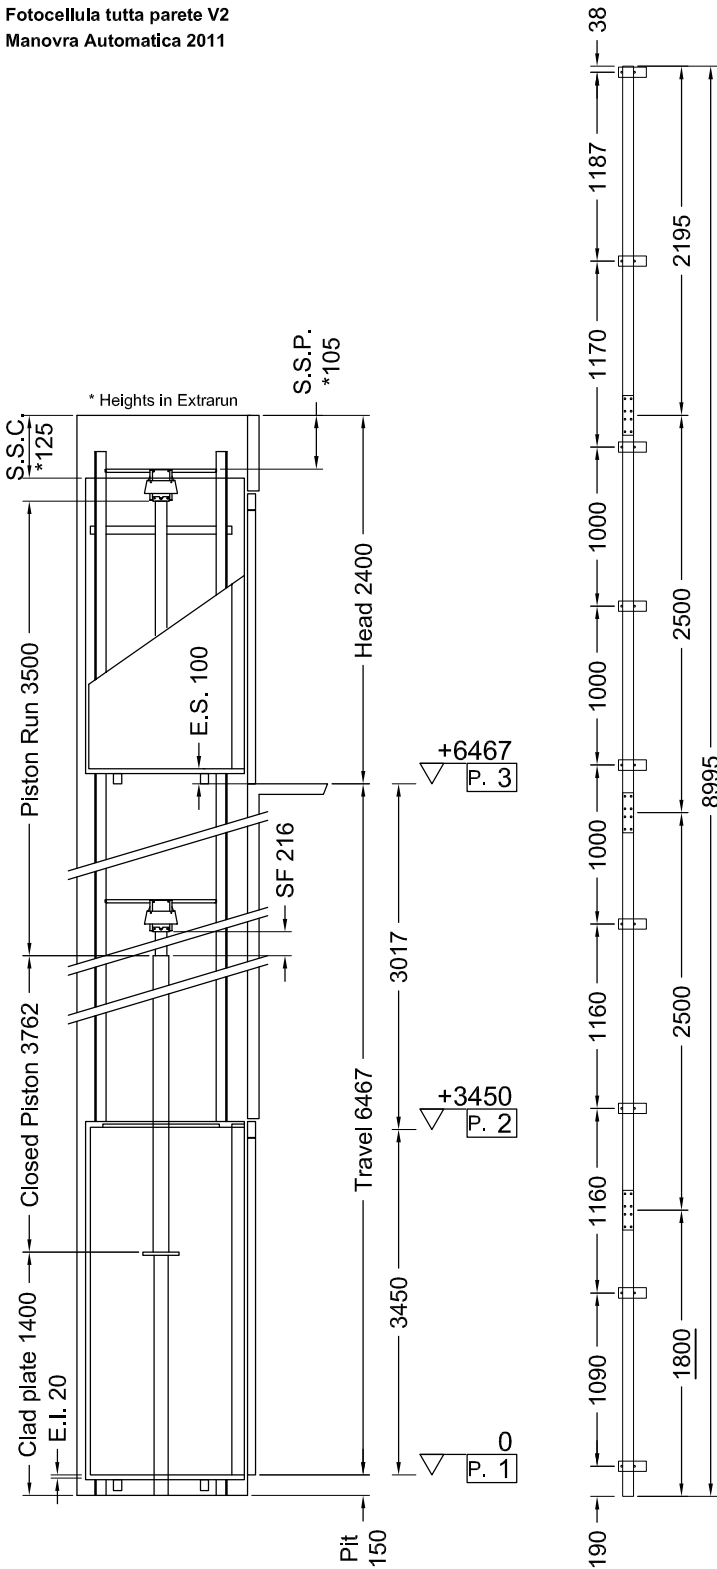

Indirect Installation	Speed 0,3 m/s	27/08/14 11.18 (V.2846)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11201	P	(N)	619
N	(N)	802	N	(N)	7651
F1	(N)	1487	F1	(N)	2479
F2	(N)	235	F2	(N)	392

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	37,51
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	22,21
SF.	Piston extraction (mm)	216	Overpressure limit (bar)	52,51
S.S.P.	Piston/head (mm)	105	Residual pressure (bar)	1,61
S.S.C.	Cabin/head (mm)	125		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 9
Motor (V)	MF230V	Cables	\varnothing 9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	12000
Nominal current (A)	19	Min actual breaking load (N)	47300
Piston	START Hom\varnothing 70x5x3500		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	11000		
Min hydraulic oil (L)	49		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	1	Length of the hose travel	7000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Galvanized sheet	1/2 Mirror	Side A
Finishes	Paint RAL 9004	Panoramic ***	Side B, D
Oper. panel	HORIZONTAL **	Outside covering	Side B, D
Floor	By Customer	Outside finishing	RAL 9004
Ceiling	Transparent acrylic wiring for LED spots Included - RAL 9004		

(**) *Flush COP with recessed buttons (RAL 9004) Ft. 2051* (***) *No horizontal strip*


OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Mechanic painted RAL 1003
Guldes dimension 2.5 m
Piston painted RAL 1003
Manual pump
Manostat with overweight signal
Two speed
False head device
Handles CASPIM
Telephone by Lift Shop
Full height Infra-red curtain V2
Automatic Control 2011

Final Drawings	1° STESURA
L. Del Bianco	27/08/14
Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/4

Shaft V66 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	RAL 9004	See pages 3 and 4	Pit bottom	For Inside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	RAL 9004	Vedi Pag. 3 e 4	Fondo Fossa	Per interno	

Anchorage in height of 3 frames in head and every 3.5 m max

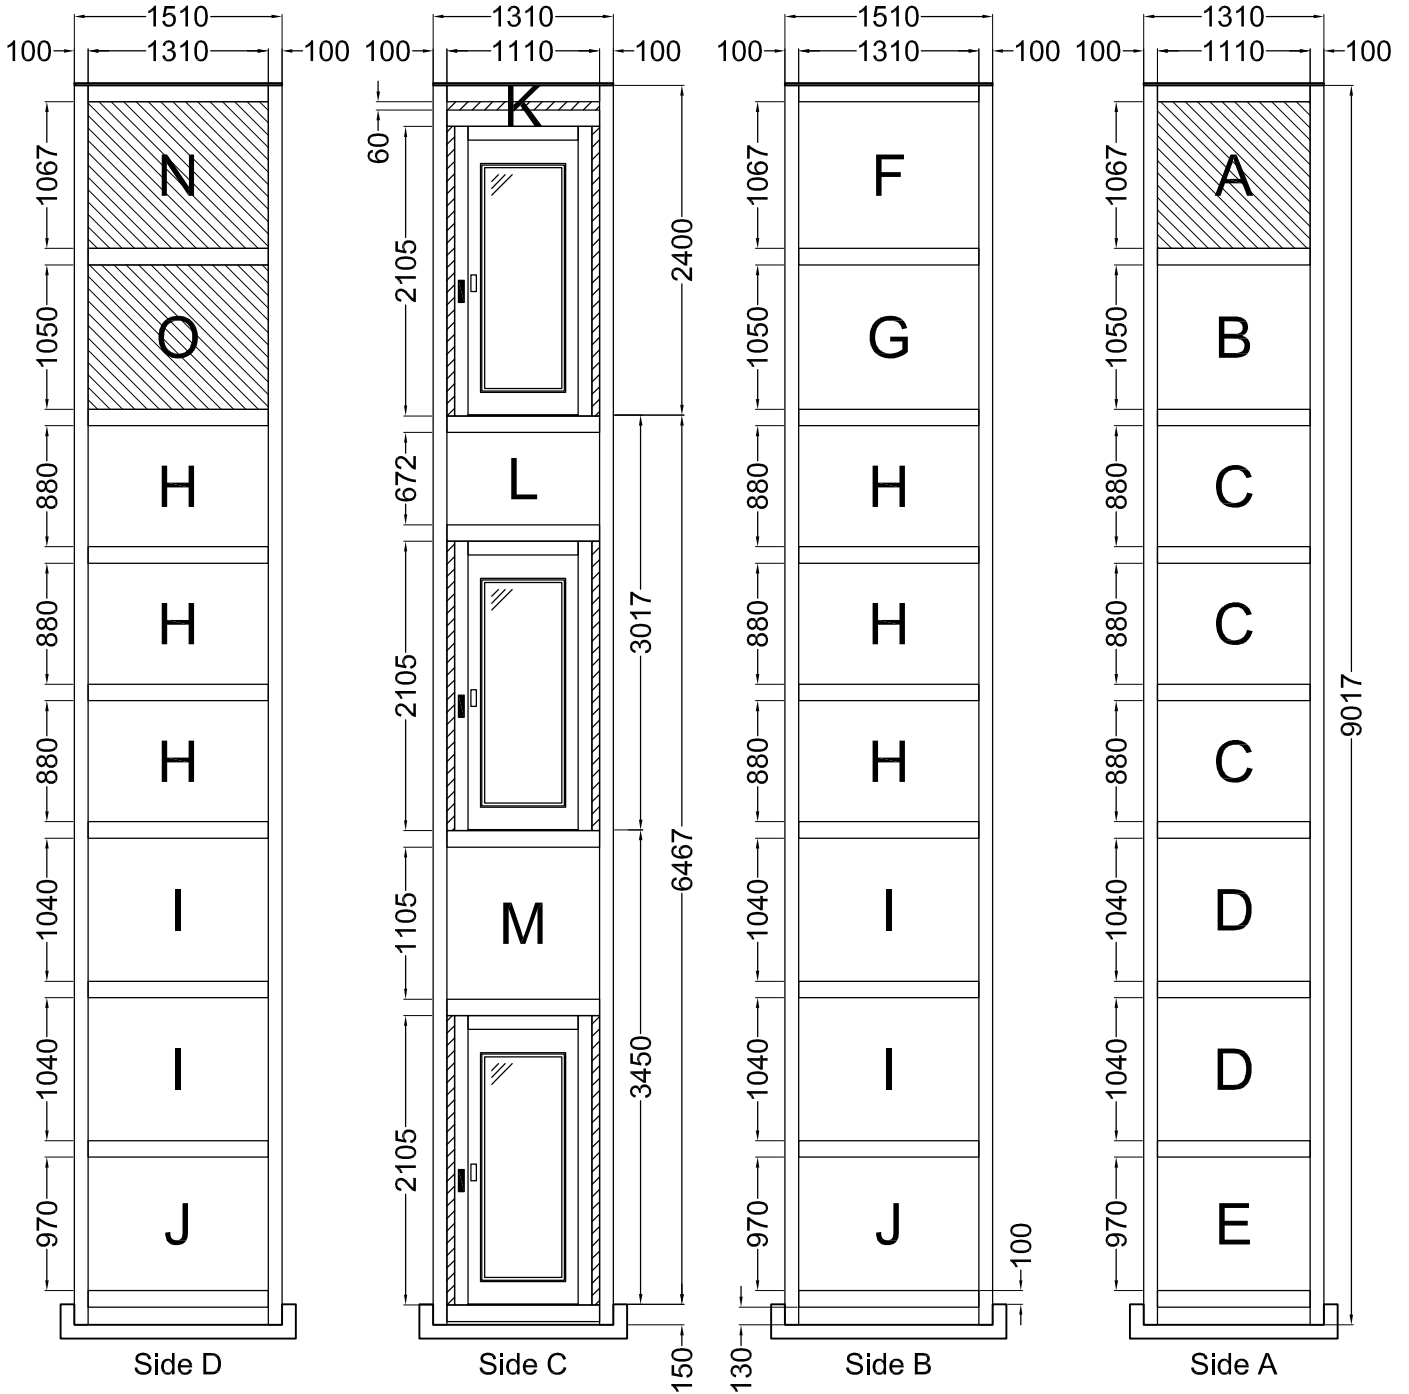

Cladding RAL 9004

Cladding Bianco A32PP