


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
	1 3 4	2	Standard RAL 9003	2000	2100	Panoramic	Bronze			X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

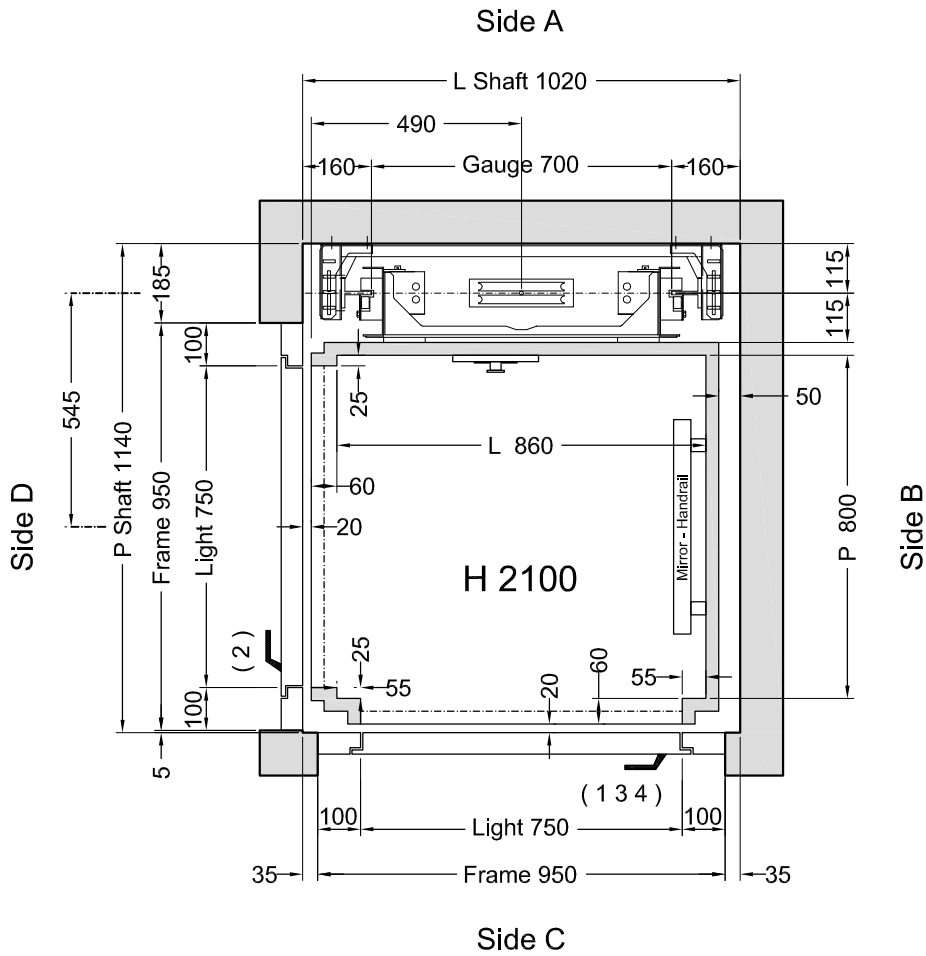

Pavimento a carico Cliente: Dim. **890** (L) x **830** (P) Spes. **15** mm Peso: **50** Kg
(EN)


Stops: 4 - Doors: 4

Shaft on **Masonry (Muratura)**

VERSIONS	Description	Designer	Date	Rev. Disegno Definitivo
	2	Locale macchine al piano 4 distante 4 m.	L.Del Bianco	
1	Accesso da Lato B a Lato D; Cernieratura porte; Pistone con valvola in basso.	L.Del Bianco	18/05/2010	SHEET DIMENS. A3
C	Corsa; Tetto; Pannelli; Locale macchine; Vetro porte.	L.Del Bianco	11/05/2010	SCALE 1:12.5
B	Disposizione accessi; Correzione: rimesse chiavi D.E. ai piani ed il vetro alle porte.	L.Del Bianco	26/10/2009	
		Disegno Definitivo L.Del Bianco	1° STESURA 22/06/09	
		CAPACITY 300 Kg	AREA m ² 0,69	CAPACITY

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Manovra Automatica
- Interruttore blocco porta quadro
- Maniglie CASPIM
- Fotocellula tutta parete

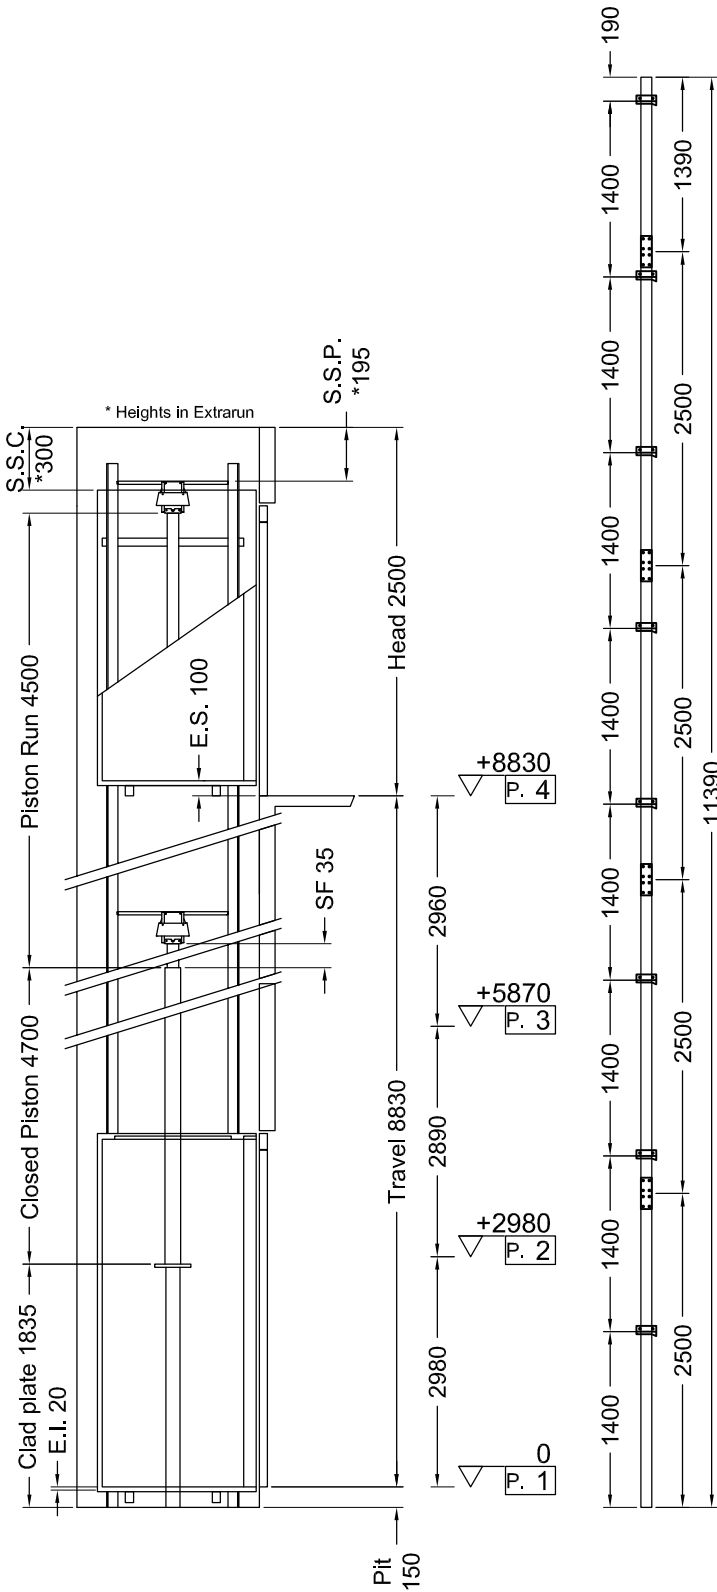

Indirect Installation	Speed 0,3 m/s	08/06/10 08.19 (V.2204)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	9280	P	(N)	697
N	(N)	1021	N	(N)	6510
F1	(N)	1066	F1	(N)	1777
F2	(N)	216	F2	(N)	359

SPACES		PRESSURES		
E.I.	Extrairun below cabin (mm)	20	Max static pressure (bar)	30,73
E.S.	Extrairun above cabin (mm)	100	Min static pressure (bar)	15,44
SF.	Piston extraction (mm)	35	Overpressure limit (bar)	43,02
S.S.P.	Piston/head (mm)	195	Residual pressure (bar)	1,81
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	Start 96SLE	Runners	T70-2A
Capacity (l/min)	35	Brackets (Nr)	8
Motor (V)	MF220V	Cables	9 mm 6-(1+9+9)
Power (Kw)	3	Cables lenght (mm) 2 x	13900
Piston	Start Elevator(ø) 70x5x4500	Min actual breaking load (N)	42100
Opt. oil position	basso		
Tubing	Start		
Tubing lenght (mm)	15000		
Min hydraulic oil (L)	65		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	Start	1/2"03026/01;03026/02	IMQ CA50.00526
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	4	Away from shaft (mm)	4000
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Antracite N4	Mirror	Lati B
Finishes	Inox Scotch Brife	Handrail	INOX S.B., Latl B
Oper. panel	A COLONNA		
Floor	a carico Cliente		
Roof	UNIVERSAL-Bianco A1		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Double speed
Automatic control
Cabinet General switcher to enabling controller
Handles CASPIM
Full height infra-red curtain

Le informazioni contenute nel presente disegno sono integrate dal manuale opere murarie.