


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G 1			Standard Rust-proof *	2000	2100	Rust-proof	Panoramic	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

*No raised edges

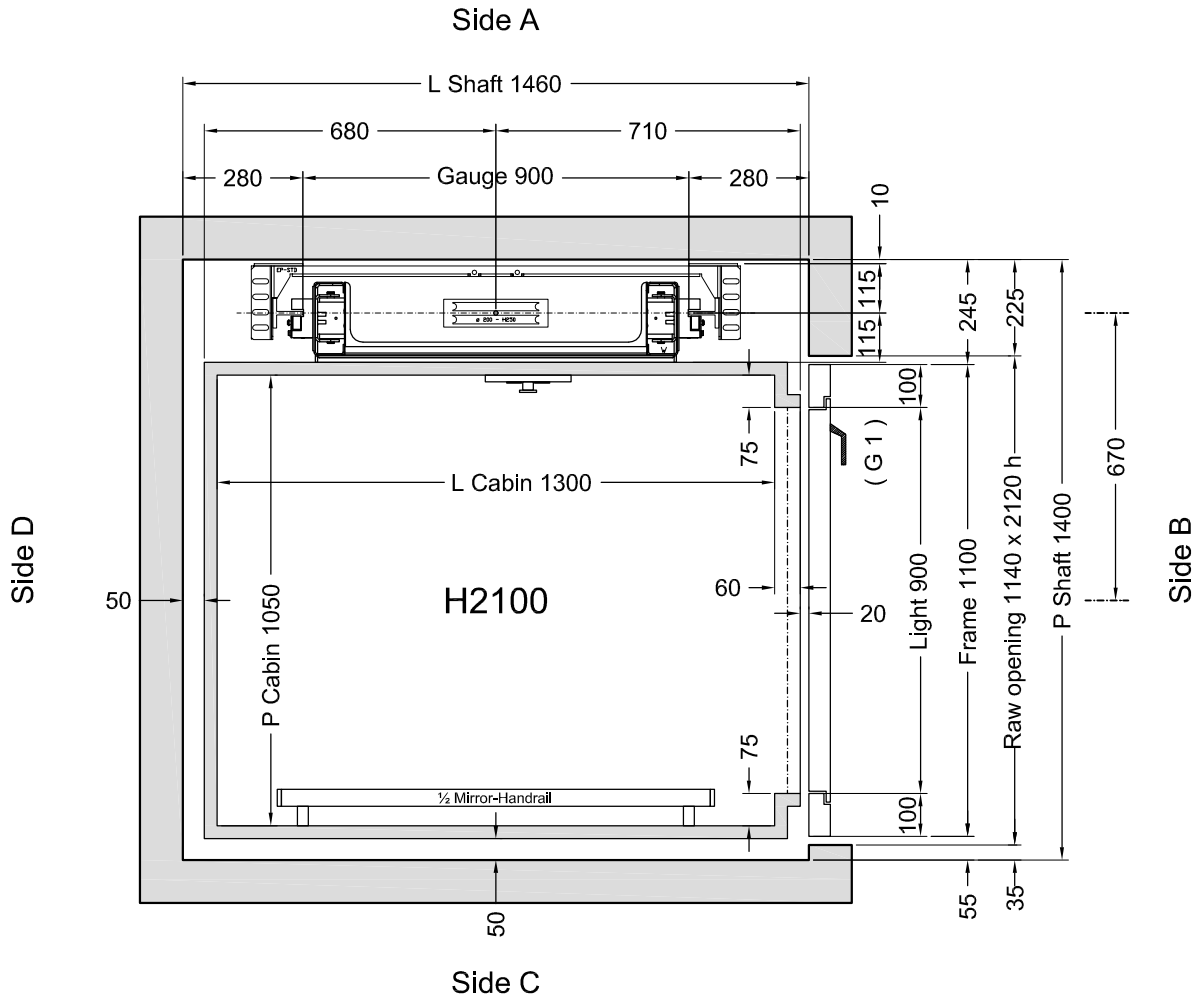



Customer own flooring: Dimensions **1330** (L) x **1050** (P) thks **15** mm Weight: **24** kg

Stops: 2 - Doors: 2


Shaft in **Masonry (Muratura)**

Preliminary Plans Only: NOT for Construction

VERSIONS	Description	Designer	Date	Final Design Drawings	
					Model ELFO
	Corsa, denominazione piani - posizione specchio - Porte di piano	Colamarino	06/09/2013		SHEET DIMENS. A3
		Final Design Drawings Colamarino	1° STESURA 01/08/13		SCALE 1:12.5
		CAPACITY 300 kg	AREA m ² 1,37	CAPACITY	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno piano basso con tempo regolabile
- Dispositivo falsa testata
- Maniglie CASPIM
- Telefono Lift Shop
- Fotocellula tutta parete
- Comando automatico al plani 2011

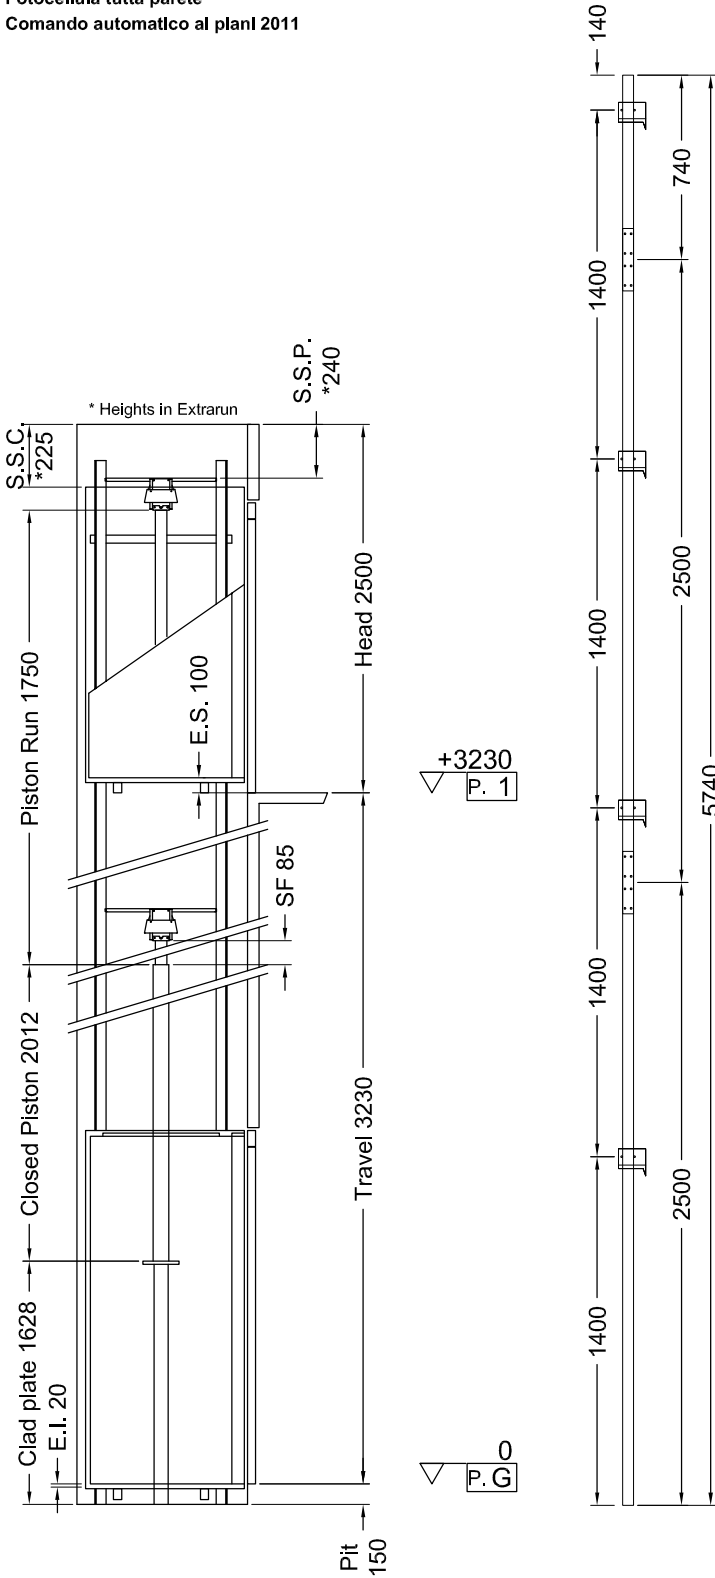

Indirect Installation		Speed 0,3 m/s	06/09/13 11.57 (V.2820)		
THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11136	P	(N)	481
N	(N)	521	N	(N)	7464
F1	(N)	1468	F1	(N)	2447
F2	(N)	330	F2	(N)	551

The schematic shows a vertical shaft with a central piston (P) and two side pistons (N). Force vectors F1 and F2 are shown acting on the pistons.

MACHINERY LOCATION			
At floor	1	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A	Hydraulic unit model	-*

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	½ Mirror	Side C
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side C
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Roof	SPOTS LED - Blanco A1		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Return to the lower floor after adjustable time
False head device
Handles CASPIM
Telephone by Lift Shop
Full height Infra-red curtain
Automatic call to floors 2011

The information contained in this drawing are completed by masonry manual rev.4 | * See masonry manual rev. 4

		Final Design Drawings Colamarino	1° STESURA 01/08/13
		Final Design Drawings	
		SCALE OUT OF SCALE	SHEET 2/2