

FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	G		Inox Super Mirror Covering **	2000	2100	Inox Super Mirror Cov. **	Absent		
	1		Standard RAL 7001 ***	2000	2100	RAL 7001 ***	P1 Max	Transparent	

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Shaft V66 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Outside	G + RAL *	See pages 3 and 4	Pit bottom	For Outside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Esterno	Z + RAL *	Vedi Pag. 3 e 4	Fondo Fossa	Per esterno	


(*) Galvanized and RAL 9023 Smooth Gloss

(***) Smooth finish - No raised edges

(*) Zincata e RAL 9023 Liscio Lucido

(**) No raised edges

Side A

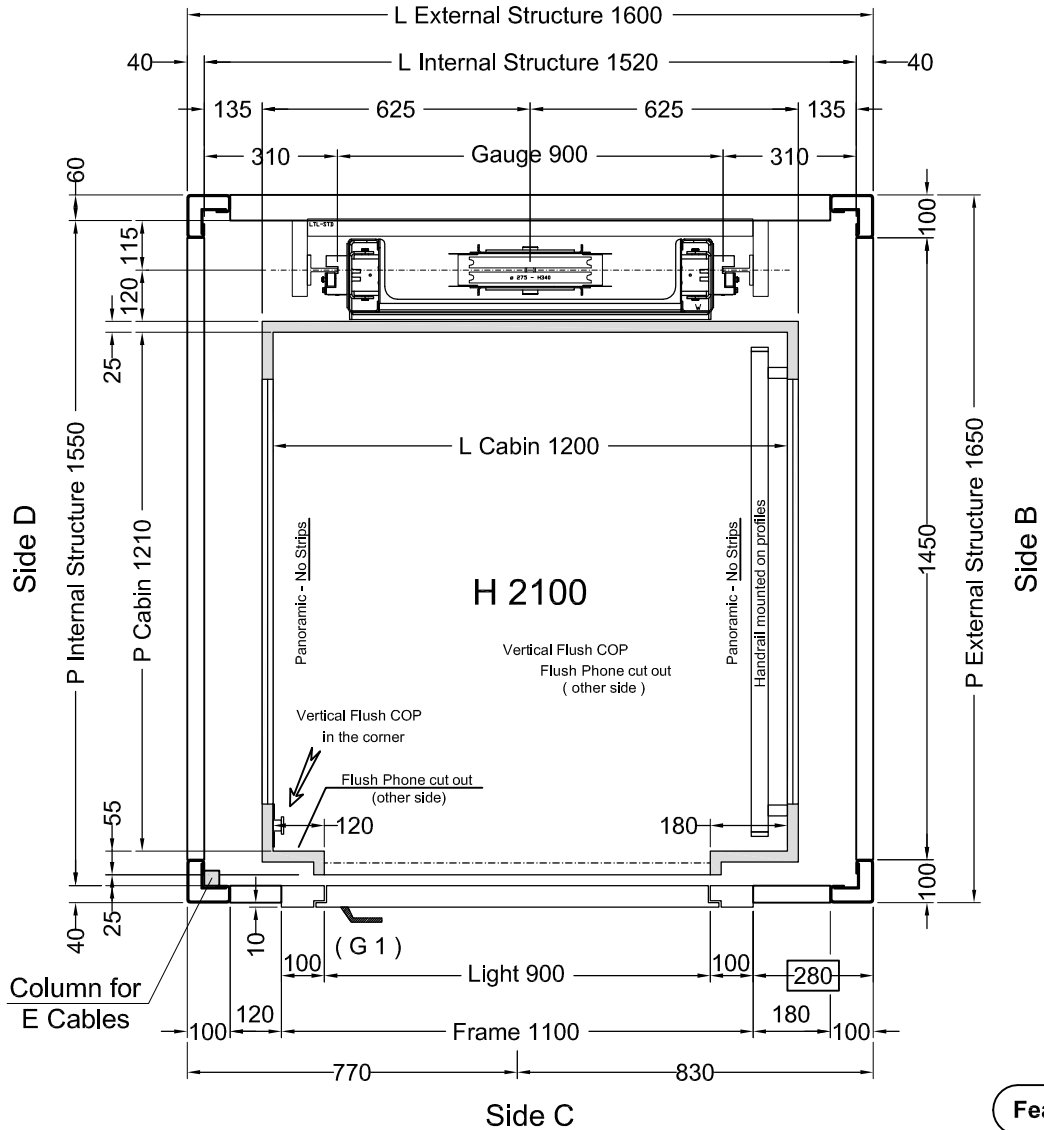

Cabina Classica




Feasibility n° 2711

Stops: 2 - Doors: 2

Shaft in **Shaft V66 ()**

Customer own flooring: Dimensions **1200 (L) x 1235 (P)** thks **20 mm** Weight: **50 kg**

		Designer	Date	Final Drawings	
				:	S.
		550 kg	1,46		

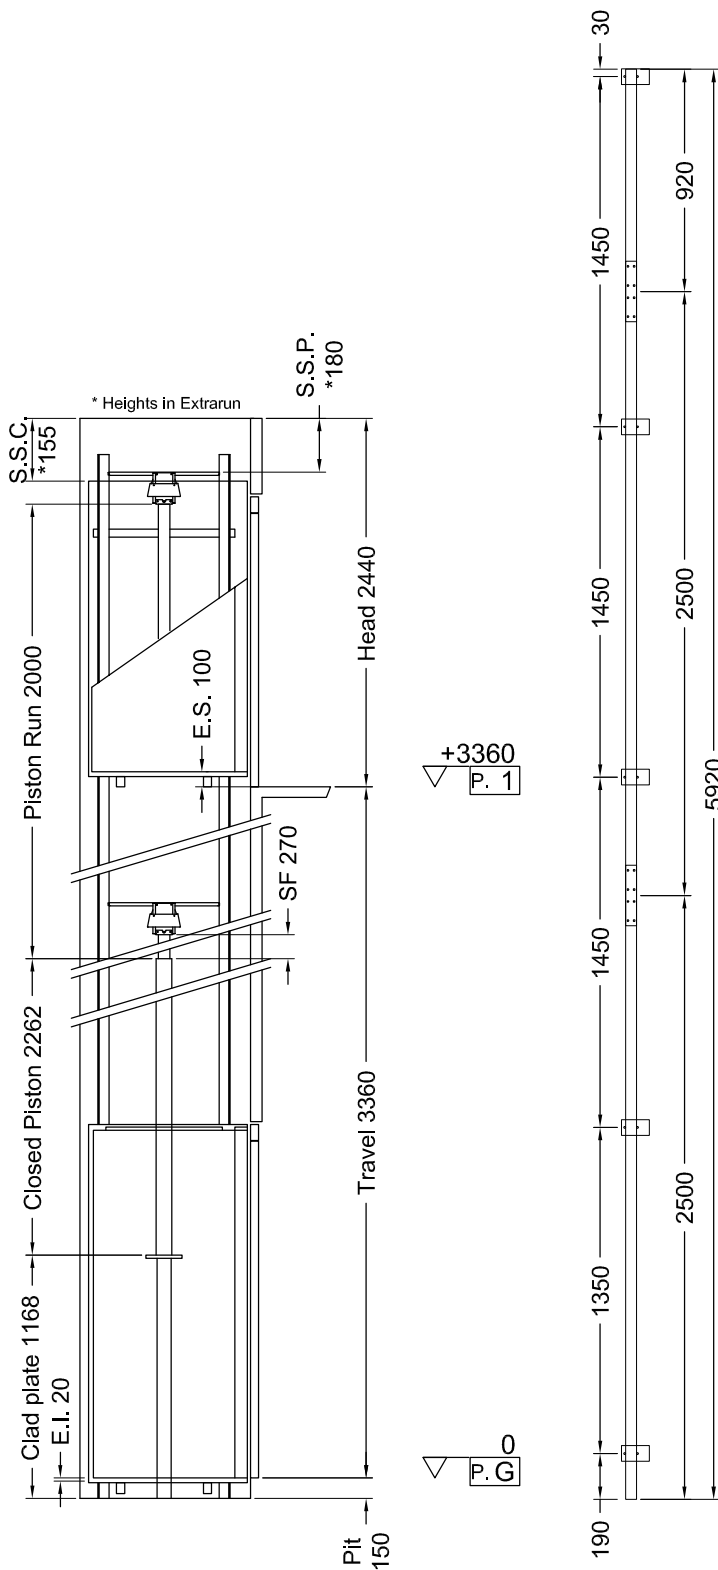

Indirect Installation Speed **0,3 m/s** 26/02/16 09.12 (V.2876)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12389	P	(N)	550
N	(N)	559	N	(N)	8269
F1	(N)	1850	F1	(N)	3083
F2	(N)	319	F2	(N)	532

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	40,9
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	23,06
SF.	Piston extraction (mm)	270	Overpressure limit (bar)	57,27
S.S.P.	Piston/head (mm)	180	Residual pressure (bar)	1,43
S.S.C.	Cabin/head (mm)	155		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 5
Motor (V)	MF230V	Ropes	Ø 11 mm 6-(1+9+9)
Power (Kw)	3,4	Cables lenght (mm) 2 x	9000
Nominal current (A)	32	Min actual breaking load (N)	70700
Piston	Start Home (ø)70x5x2000		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing lenght (mm)	11000		
Min hydraulic oil (L)	42		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	7000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	F41PPS	Panoramic No Strip	Side B, D
Finishes	F41PPS	Handrail (on profiles)	Inox S.B., Side B
Oper. panel	Vertical Flush mounted **	Outside covering	Side B, D, Roof
Floor	By Customer	Outside finishing	F41PPS
Ceiling	UNIVERSAL - F41PPS		
(**) Corner D/C - Inox Scotch Brite			

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
<u>Two speed</u>
Return to the lower floor after adjustable time
False head device
Handles CASPIM (Short)
Telephone by Lift Shop
Full height Infra-red curtain V2
Car Operating Panel Side D
<u>Roof covering</u>
Automatic Control 2011
<u>Call Accept + Emergency manual descent from cabin</u>
Cabin Buttons: "G, 1"
<u>Cut out for flush phone 86 mm x 175 mm (Corner C/D)</u>

