


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		G 1 2	STD Alum. Cover RAL 8019 *	2000	2100	Alum. Cover RAL 8019 *	Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Smooth finish no raised edges

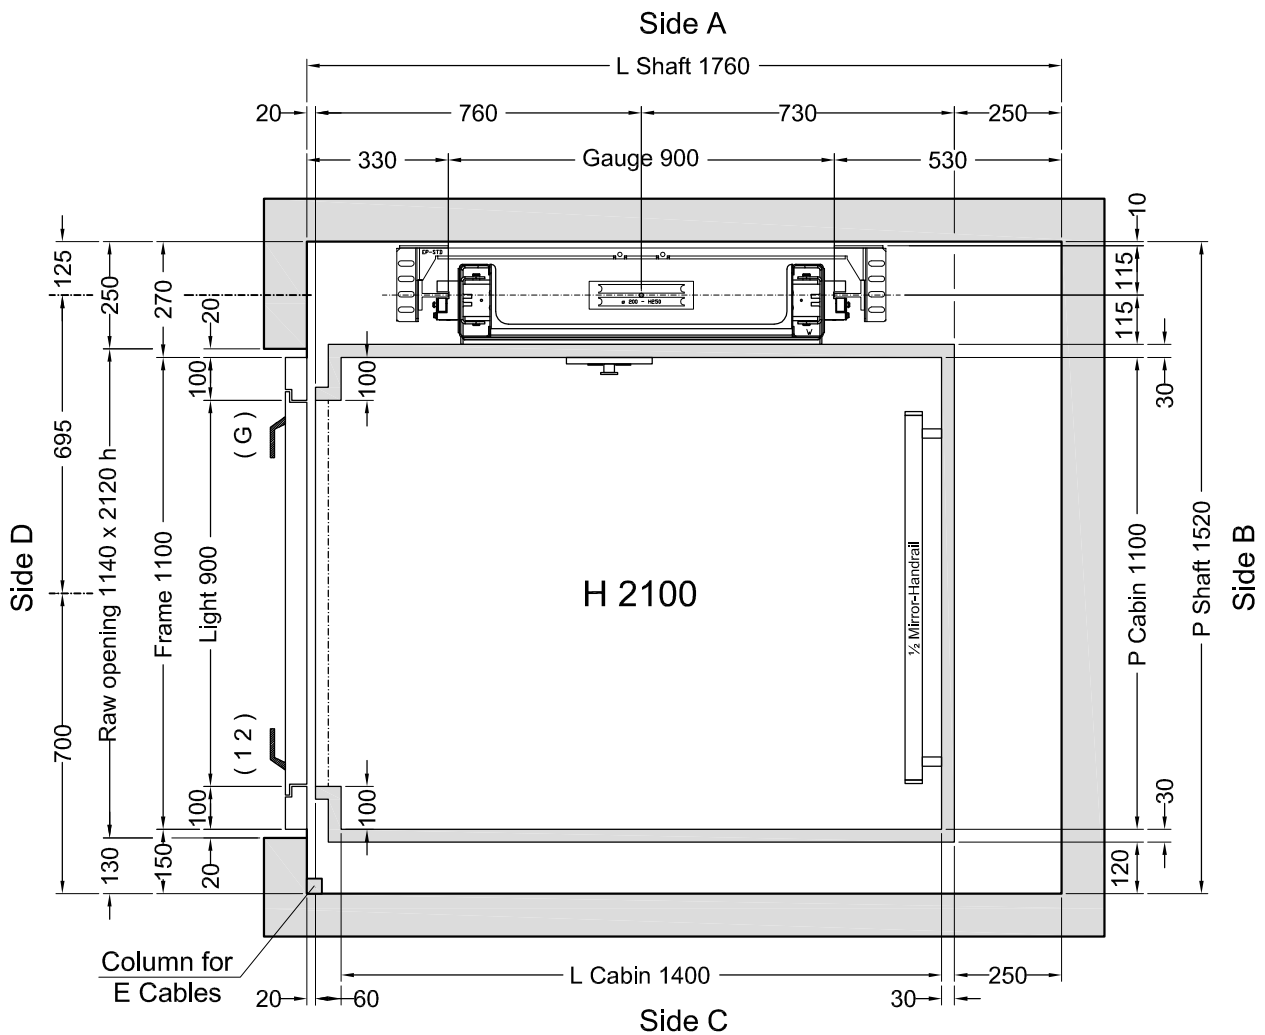


Stops: 3 - Doors: 3


Shaft in **Reinforced concrete (C.A.)**

Customer own flooring: Dimensions **1430 (L) x 1100 (P)** thks **20 mm** Weight: **50 kg**

			Designer	Date	Final Drawings	
					Model	SHEET
					ELFO	1/2
					SHEET DIMENS.	A3
			Final Drawings	1° STESURA		SCALE
			L. Del Bianco	04/09/15		1:12.5
			CAPACITY	AREA m²	CAPACITY	
			300 kg	1,54		

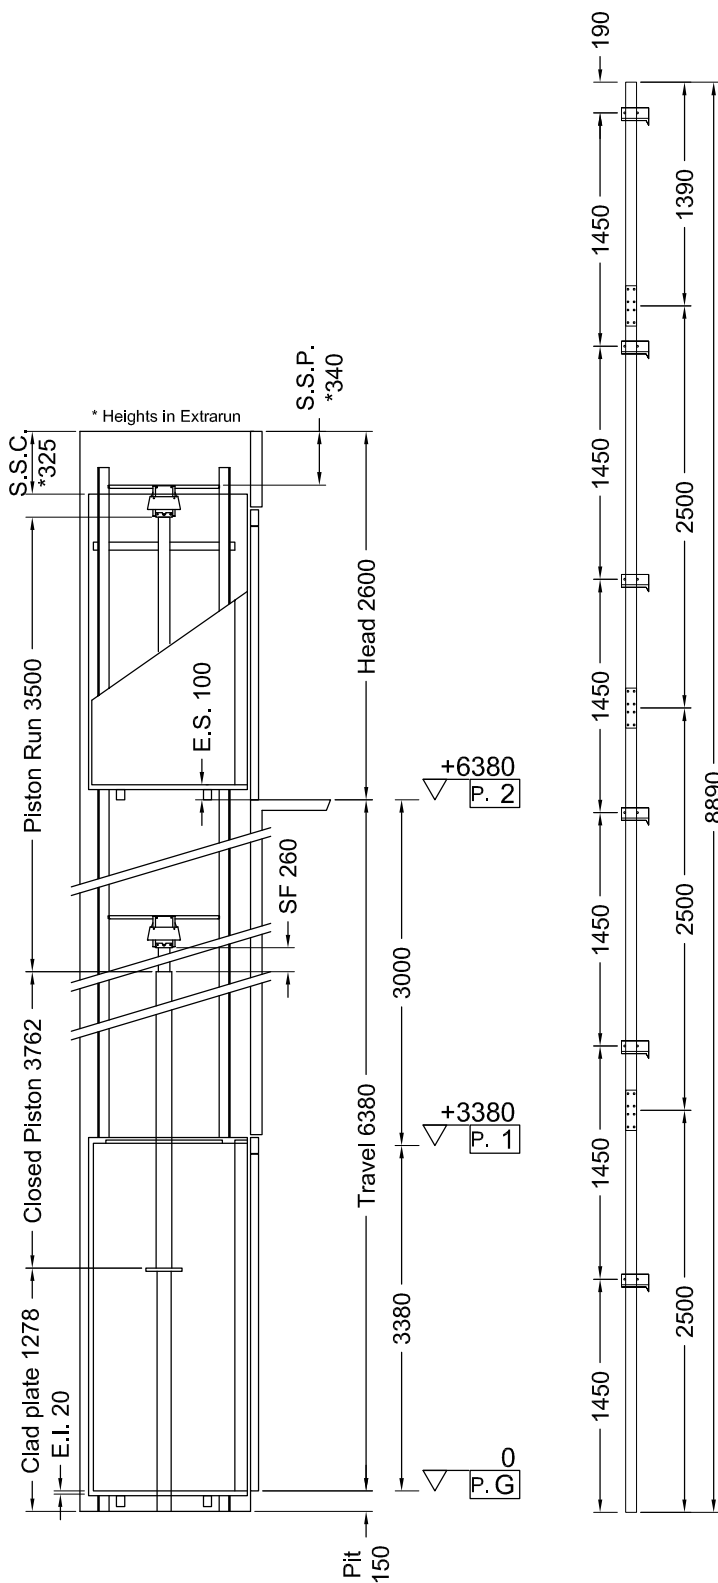

Indirect Installation		Speed 0,3 m/s	04/09/15 09.37 (V.2852)
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.	
P	(N) 12685	P	(N) 619
N	(N) 847	N	(N) 8685
F1	(N) 1719	F1	(N) 2865
F2	(N) 398	F2	(N) 664
SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm) 20	Max static pressure	(bar) 38,31
E.S.	Extrarun above cabin (mm) 100	Min static pressure	(bar) 23,02
SF.	Piston extraction (mm) 260	Overpressure limit	(bar) 53,64
S.S.P.	Piston/head (mm) 340	Residual pressure	(bar) 1,61
S.S.C.	Cabin/head (mm) 325		
HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 6
Motor (V)	MF230V	Ropes	Ø 9 mm 8-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	12000
Nominal current (A)	27	Min actual breaking load (N)	51000
Piston	Start Home (Ø) 70x5x3500		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	6000		
Min hydraulic oil (L)	48		
SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	
MACHINERY LOCATION			
At floor	0	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	A		
CABIN	CABIN ACCESSORIES		
Panels	Antracite N4	½ Mirror	Side B
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side B
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Ceiling	SPOTS LED - F41PPS		
OTHER ACCESSORIES			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Two speed			
Telephone by Lift Shop			
Full height Infra-red curtain V2			
Automatic Control 2011			
Cabin Buttons "G 1 2"			
Blue Buttons			
Call Accept + Emergency manual descent from cabin			



Final Drawings	1° STESURA
L. Del Bianco	04/09/15
Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/2