

FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		G 1 2	Aluminium Anodized RAL 7022 **	2000	2100	Anodized Al. + RAL 7022 **	Panoramic	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Shaft V52 ()


ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Outside	G + RAL *	Glass Transparent	Pit bottom	For Outside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Esterno	Z + RAL *	Vetro	Fondo Fossa	Per esterno	

(*) Galvanized and RAL 7022 **

(**) Semi Polished - Smooth finish

(*) Zincata e RAL 7022 **

(**) Semi Lucido Liscio

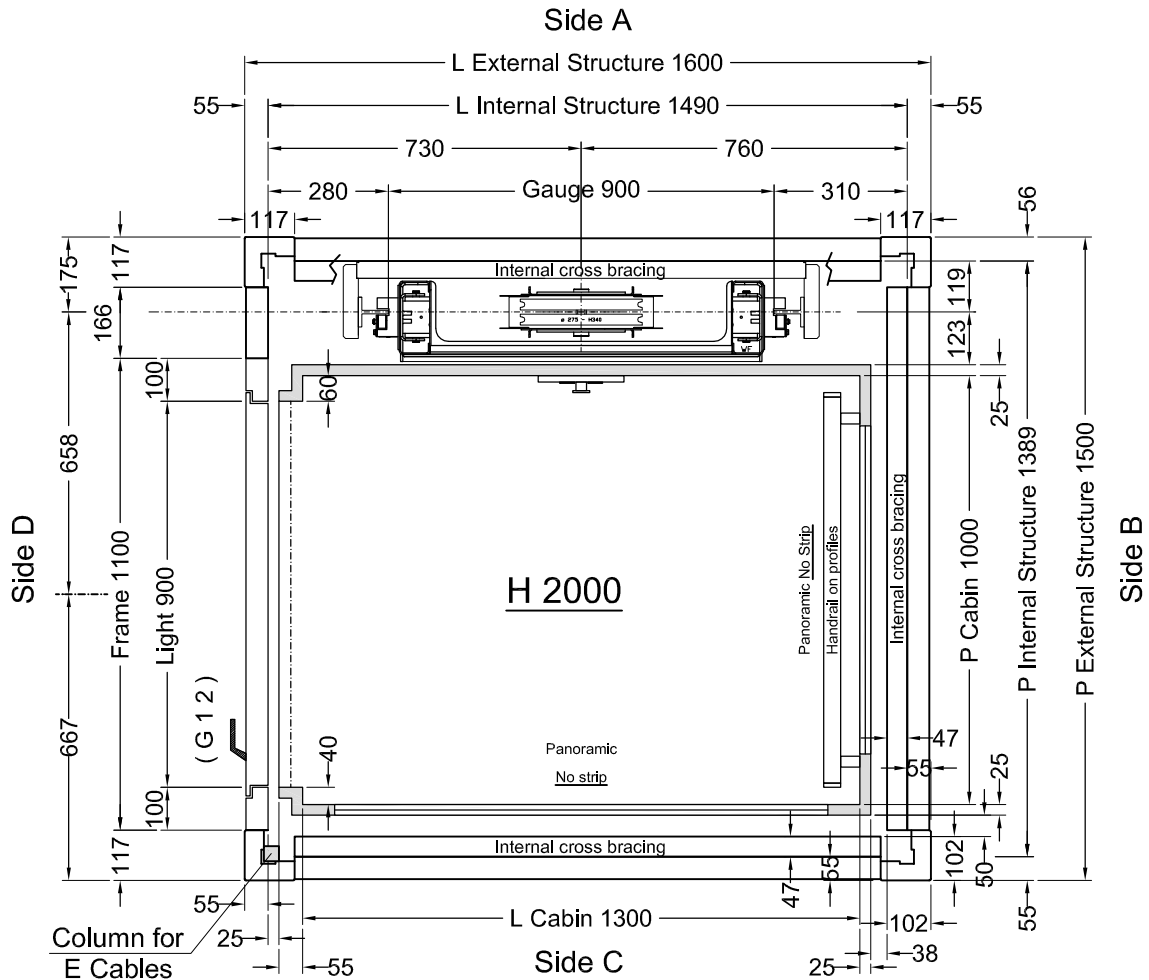

Cabina
Classica

2
1
G


Stops: 3 - Doors: 3

Shaft in **Shaft V52 ()**

Customer own flooring: Dimensions **1325 (L) x 1000 (P)** thks **20 mm** Weight: **40 kg**

VERSIONS	Description	Designer	Date	Final Drawings	
				Model	SHEET
				ELFO	1/4
	Corsa da 6165 a 6155.	D.Tomei	01/06/2016		SHEET DIMENS.
	Varie modifiche.	L. Del Bianco	24/05/2016		A3
		Final Drawings L. Del Bianco	1° STESURA 17/06/16		SCALE 1:12.5
		CAPACITY 300 kg	AREA m ² 1,3	CAPACITY	



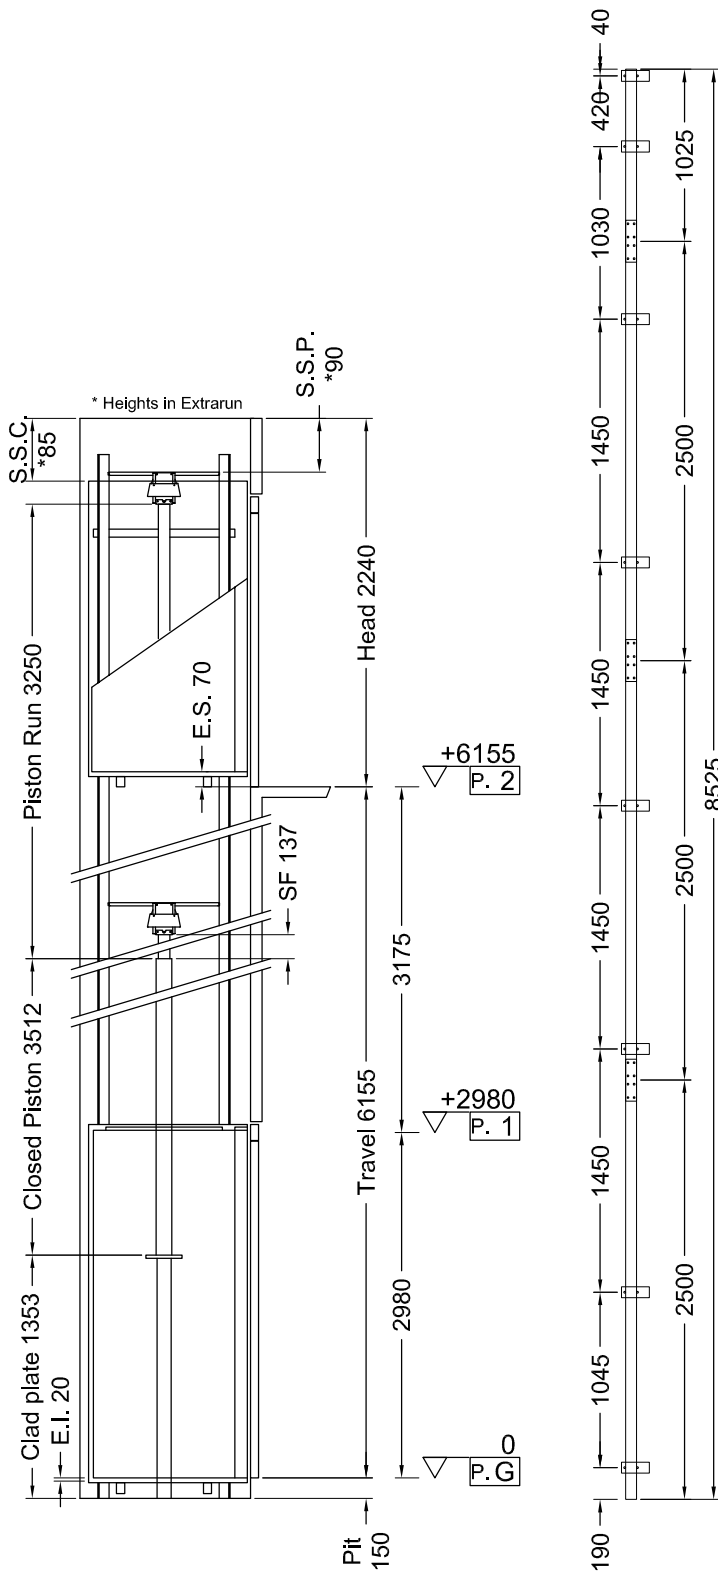

Indirect Installation Speed **0,3 m/s** 17/06/16 15.15 (V.2891) (60)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11116	P	(N)	648
N	(N)	812	N	(N)	7575
F1	(N)	1434	F1	(N)	2390
F2	(N)	326	F2	(N)	544

SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm)	Max static pressure (bar)	35,84
E.S.	Extrarun above cabin (mm)	Min static pressure (bar)	20,54
SF.	Piston extraction (mm)	Overpressure limit (bar)	50,17
S.S.P.	Piston/head (mm)	Residual pressure (bar)	1,68
S.S.C.	Cabin/head (mm)		


HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 8
Motor (V)	MF230V	Ropes	\varnothing 9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	12000
Nominal current (A)	27	Min actual breaking load (N)	47300
Piston	Start Home (\varnothing) 70x5x3250		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	7000		
Min hydraulic oil (L)	47		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Grigio PPS1	Panoramic	No Strip Side B, C
Finishes	F41PPS	Handrail on profiles	Inox S.B., Side B
Oper. panel	VERTICAL (Like finishes)	Outside covering	Side B, C, D, Roof
Floor	By Customer	Outside finishing	F41PPS
Ceiling	SPOTS LED - Blanco A32PP		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - Return to the lower floor after adjustable time
 - False head device
 - Handles CASPIM (Long)
 - Telephone by Lift Shop
 - Full height Infra-red curtain V2
 - Roof covering
 - Automatic Control 2011
 - Call Accept + Emergency manual descent from cabin
 - Blue Buttons - Cabin Buttons: "G, 1, 2"



Final Drawings	L. Del Bianco	1° STESURA	17/06/16
Final Drawings			
SCALE	OUT OF SCALE	SHEET	2/4

Shaft V52 ()


ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Outside	G + RAL *	Glass Transparent	Pit bottom	For Outside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Esterno	Z + RAL *	Vetro Trasparente	Fondo Fossa	Per esterno	

(*) Galvanized and RAL 7022 **
 (*) Zincata e RAL 7022 **

(**) Semi Polished - Smooth finish
 (**) Semi Lucido Liscio

Anchorage in height of 3 frames in head and every 3.5 m max

Internal cross bracing Side A, B, C Crociere interne Lati A, B, C

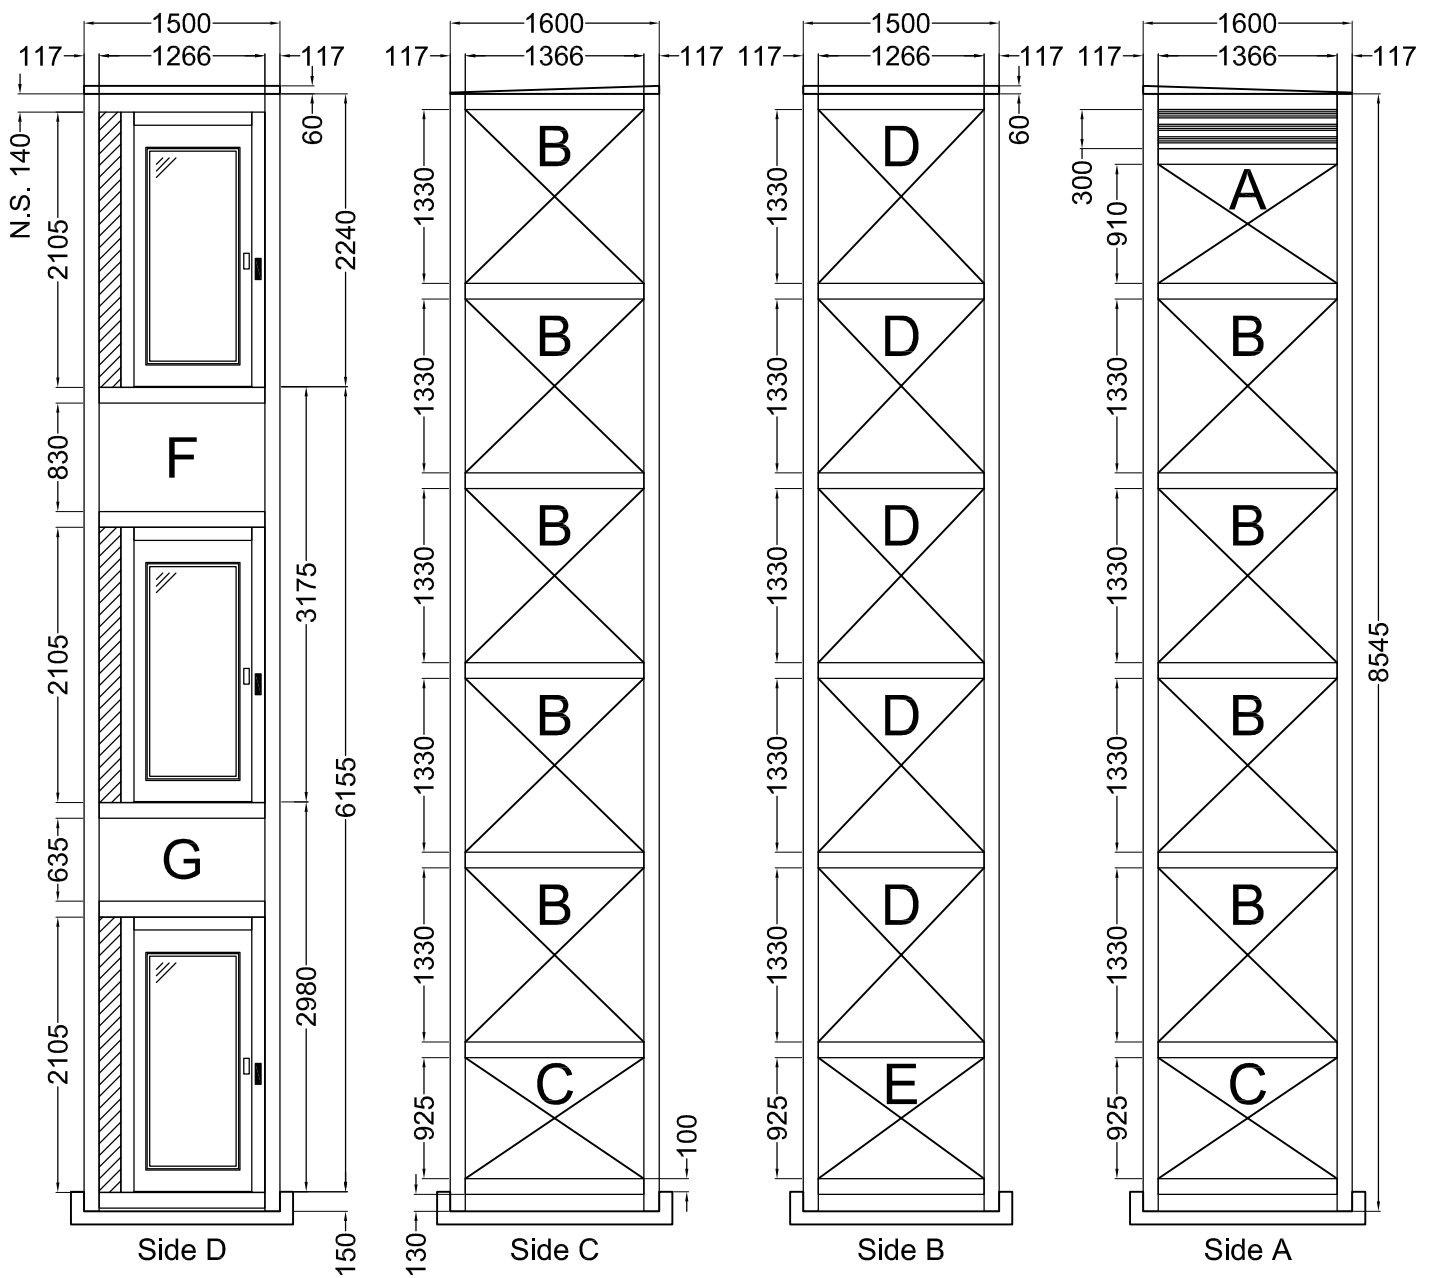

- Grid G + RAL 7022 Semi Polished - Smooth finish
- CLADDING G + RAL 7022 Semi Polished - Smooth finish

Cladding

Tag	Q.ty	Type	Thickness	Width	Height
A	1	Glass Transparent	8/9	1386	932
B	9	Glass Transparent	8/9	1386	1352
C	2	Glass Transparent	8/9	1386	947
D	5	Glass Transparent	8/9	1286	1352
E	1	Glass Transparent	8/9	1286	947
F	1	Glass Transparent	8/9	1286	852
G	1	Glass Transparent	8/9	1286	657

