



## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G 1 2			Gal.+Aluminium Cov. + RAL 9010*	2000	2100	Gal.+Al. Cov. + RAL 9010*	Panoramic	Transparent	C2 - Doors Hold Open Latch

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(\*) Polished - Smooth finish - No raised edges

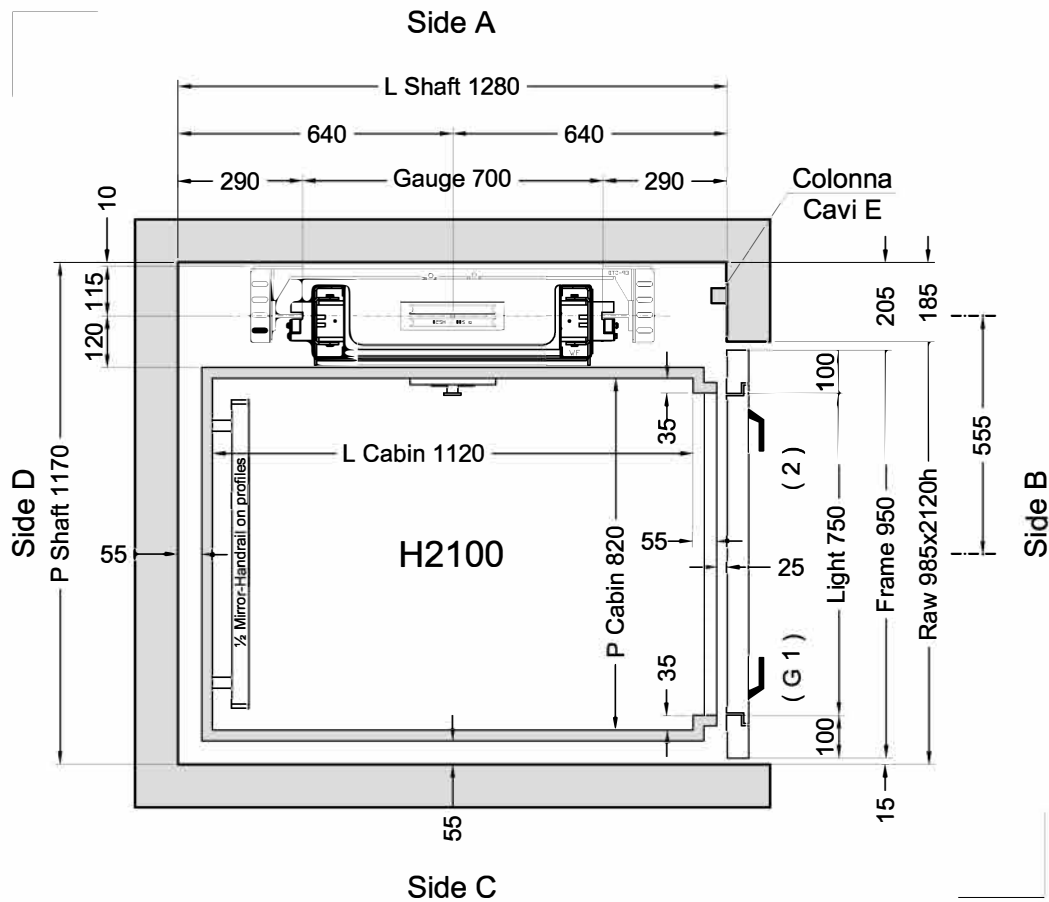


**Stops: 3 - Doors: 3**

Shaft in **Reinforced concrete (C.A.)**

Customer own flooring: Dimensions **1145 (L) x 820 (P)** thks **20 mm** Weight: **50 kg**

ORDER	VERSIONS	Description	Designer	Date	Final Drawings	
ORDER NUMBER					Model	SHEET
<b>PS2610</b>					<b>ELFO</b>	<b>1/2</b>
	modifiche varie		D. Ogliaistro	30/11/2016		SHEET DIMENS.
			Final Drawings Dario O. L. Del Bianco	1° STESURA 13/12/16		<b>A3</b>
					SCALE	
					<b>1:12.5</b>	
			CAPACITY	AREA m²	CAPACITY	
			<b>300 kg</b>	<b>0,92</b>		

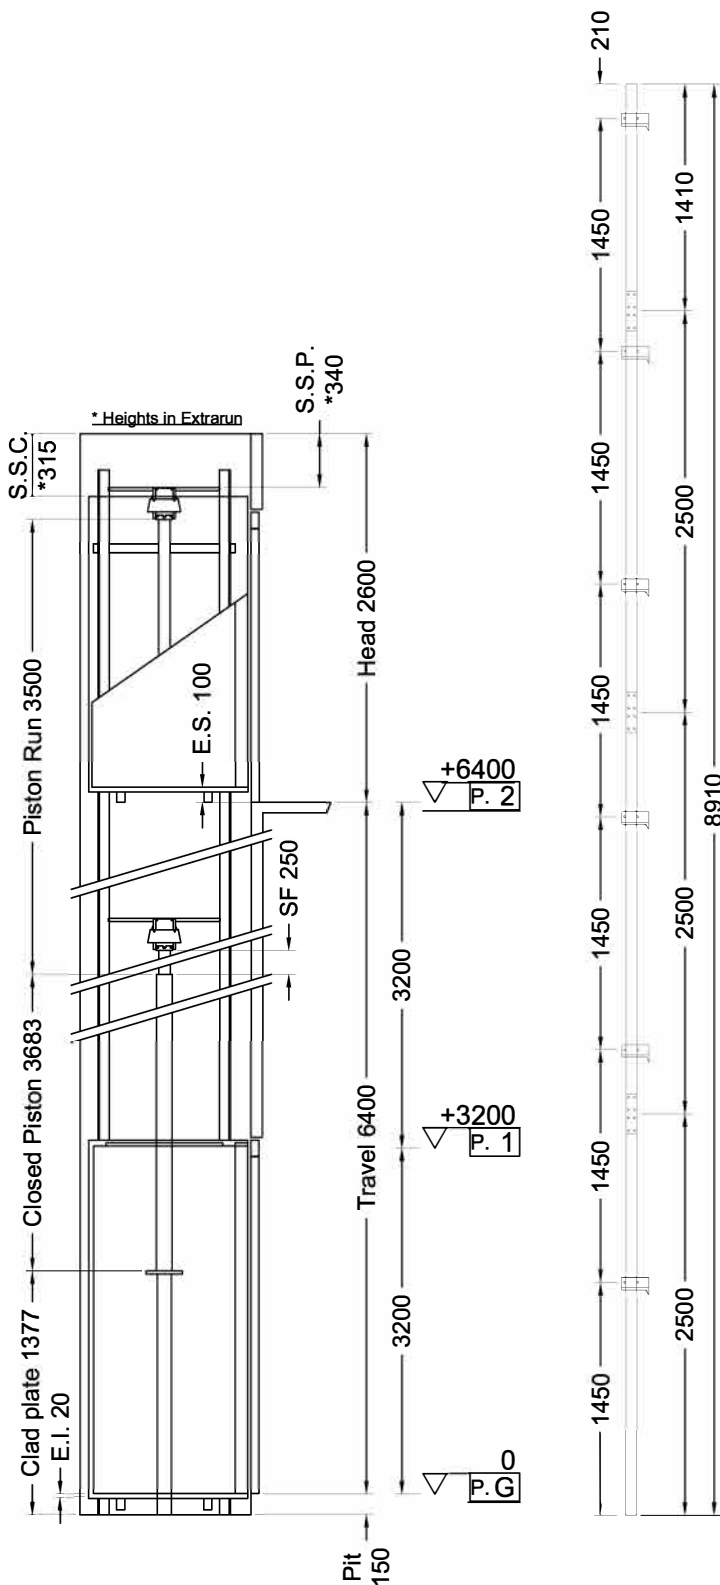

<b>Indirect Installation</b>	Speed <b>0,3 m/s</b>	13/12/16 14.34 (V.2950) <sup>62D</sup>	
<b>THRUST DURING NORMAL OPERATION</b>		<b>THRUST OF SAFETY DEVICE INTERVENT.</b>	
P	(N) <b>10322</b>	P (N) 619	
N	(N) <b>849</b>	N (N) 7112	
F1	(N) <b>1142</b>	F1 (N) 1903	
F2	(N) <b>262</b>	F2 (N) 437	
<b>SPACES</b>		<b>PRESSURES</b>	
E.I.	Extrarun below cabin (mm) <b>20</b>	Max static pressure (bar) <b>34,46</b>	
E.S.	Extrarun above cabin (mm) <b>100</b>	Min static pressure (bar) <b>19,16</b>	
SF.	Piston extraction (mm) <b>250</b>	Overpressure limit (bar) <b>48,24</b>	
S.S.P.	Piston/head (mm) <b>340</b>	Residual pressure (bar) <b>1,61</b>	
S.S.C.	Cabin/head (mm) <b>315</b>		
<b>HYDRAULIC UNIT</b>		<b>MECHANICAL PARTS</b>	
Central unit	<b>GMV HL 3010 (-*)</b>	Guide rails <b>70x70x9</b>	
Capacity (l/min)	<b>35</b>	Brackets (Nr) <b>6</b>	
Motor (V)	<b>MF230V</b>	Ropes <b>Ø 8 mm 8-(1+9+9)</b>	
Power (Kw)	<b>2,9</b>	Cables length (mm) 2 x <b>12000</b>	
Nominal current (A)	<b>27</b>	Min actual breaking load (N) <b>43300</b>	
Piston	<b>OMARLIFT HC (Ø)70x5x3500</b>		
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - FD M30X2</b>		
Tubing length (mm)	<b>10000</b>		
Min hydraulic oil (L)	<b>49</b>		
<b>SECURITY DEVICES</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Certificate</b>
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>OMARLIFT</b>	<b>HC-34</b>	<b>TÜV 44 208 07 352266 004</b>
Key Locks	<b>Prudhomme</b>	<b>PLT/L/CPX NL 11-400-1002-125-02</b>	
<b>MACHINERY LOCATION</b>			
At floor	<b>G</b>	Length of the hose travel	<b>6000 (mm)</b>
Cables enter in shaft: Side	<b>A</b>		
<b>CABIN</b>	<b>CABIN ACCESSORIES</b>		
Panels	<b>F41PPS</b>	½ Mirror	<b>Side D</b>
Finishes	<b>F41PPS</b>	Handrail on profiles	<b>Inox Lucido, Side D</b>
Oper. panel	<b>Vertical - Inox BA mecc.</b>		
Floor	<b>By Customer</b>		
Ceiling	<b>LABIRINT - F41PPS</b>		
<b>OTHER ACCESSORIES</b>			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
<b>Two speed</b>			
Handles <b>CASPIM (Long)</b>			
<b>Telephone by Lift Shop</b>			
Full height infra-red curtain V2			
Automatic Control 2011			
<b>Call Accept + Emergency manual descent from cabin</b>			
<b>Blue Buttons - Cabin Buttons: "G, 1, 2"</b>			
<b>Doors Hold Open Latch</b>			



ORDER	CLIENT
ORDER NUMBER	

Final Drawings	1° STESURA
L. Del Bianco	13/12/16
<b>Final Drawings</b>	
SCALE	SHEET
OUT OF SCALE	2/2