


The award winning leader

## **Supermec** SHAFT BY BUILDER • DRIVE TO LEFT OPPOSITE OPENING • 1100 x 1400 CABIN

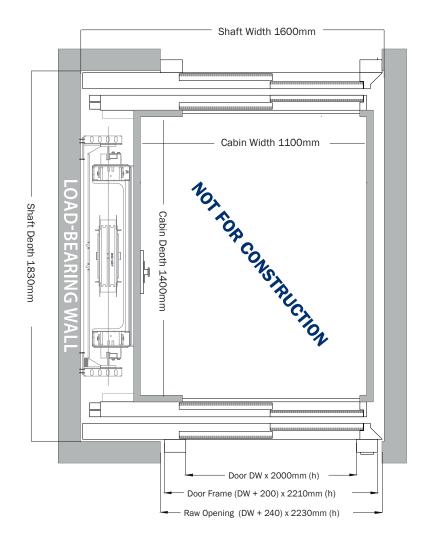

1100mm (w) x 1400mm (d) is compliant limited mobility access

This layout drawing is for guidance only please contact our sales and design consultants to ensure your complete understanding of your lift requirements

## **CONSTRUCTION DETAILS**

• Construction material re-inforced blockwork or equivalent

Internal shaft size

· Pit depth

Headroom

Lift machine area

Power supply

· Doors sizes

1600mm (w) x 1830mm (d)

260mm - 290mm (depending on floor coverings) • Maximum travel

2800mm - 2950mm - 3030mm up to 7m away at landing of choice

single phase 240V 20A

from 650mm - 1000mm in 50mm increments • Cabin fit out

different jambs may have alternate impact

## STANDARD SPECIFICATIONS

 Person capacity 480 - 630kg 0.30 - 0.50m/s Speed

 Safety protection full height sensor beams

Maximum floors

 Compliance AS1735.16/18 NCC E3.6

from our huge range of options · Doors finishes from our huge range of options

**SHOWROOMS** Sydney Melbourne Brisbane Perth 02 9666 3939 03 9421 4222 07 3014 0633 08 9460 0666 855 326 8847