




Supermec

SHAFT BY BUILDER • DRIVE TO LEFT SINGLE OPENING • 1100 x 1400 CABIN

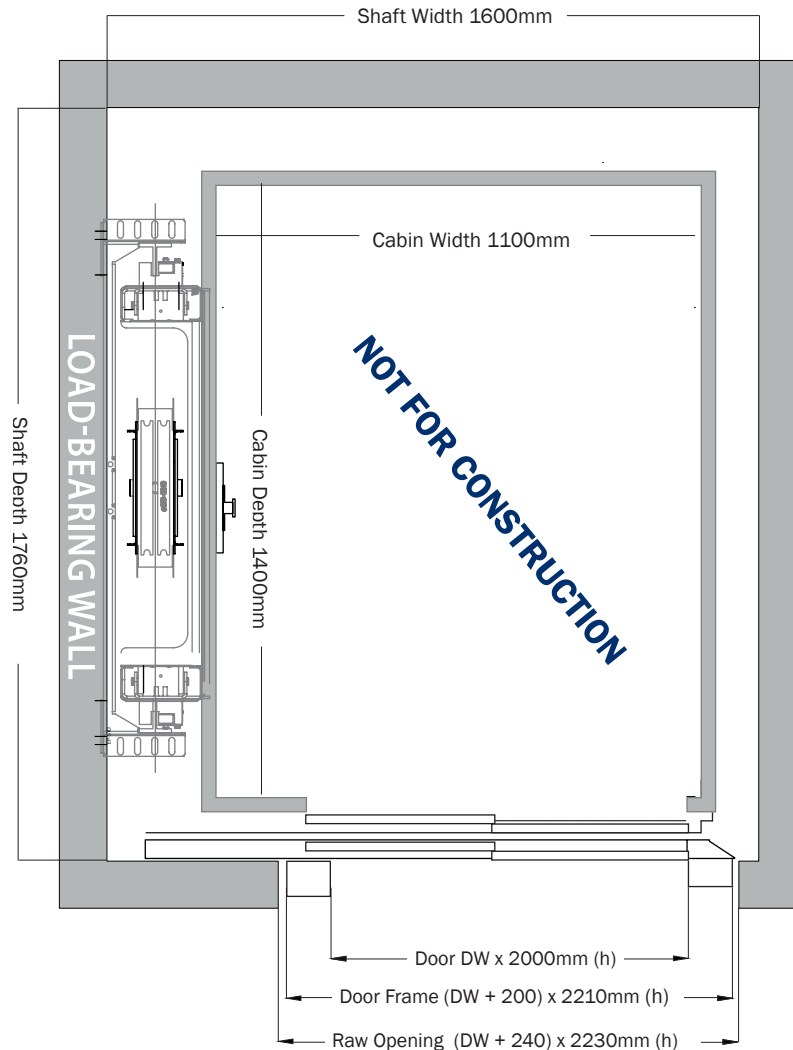

1100mm (w) x 1400mm (d) is compliant limited mobility access

This layout drawing is for guidance only please contact our sales and design consultants to ensure your complete understanding of your lift requirements. Please note flush car operating panels and door sizes may affect cabin / shaft dimensions.

CONSTRUCTION DETAILS

- Construction material re-inforced blockwork or equivalent
- Internal shaft size 1600mm (w) x 1760mm (d)
- Pit depth 260mm - 290mm (depending on floor coverings)
- Headroom 2800mm - 2950mm - 3030mm
- Lift machine area up to 7m away at landing of choice
- Power supply single phase 240V 20A
- Doors sizes from 650mm - 1000mm in 50mm increments
different jambs may have alternate impact

STANDARD SPECIFICATIONS

- Person capacity 480 - 630kg
- Speed 0.30 - 0.50m/s
- Maximum travel 12m
- Safety protection full height sensor beams
- Maximum floors 6
- Compliance AS1735.16/18 NCC E3.6
- Cabin fit out from our huge range of options
- Doors finishes from our huge range of options