

The award winning leader

E2


SHAFT BY BUILDER • DRIVE TO RIGHT ADJACENT OPENING • CUSTOM CABIN / SHAFT

HYDRAULIC OPTION

- Drive traditional hydraulic
- Machine area up to 7m away at landing of choice

ELECTRIC OPTION

- Drive next generation electric traction
- Machine area machine room less (MRL)

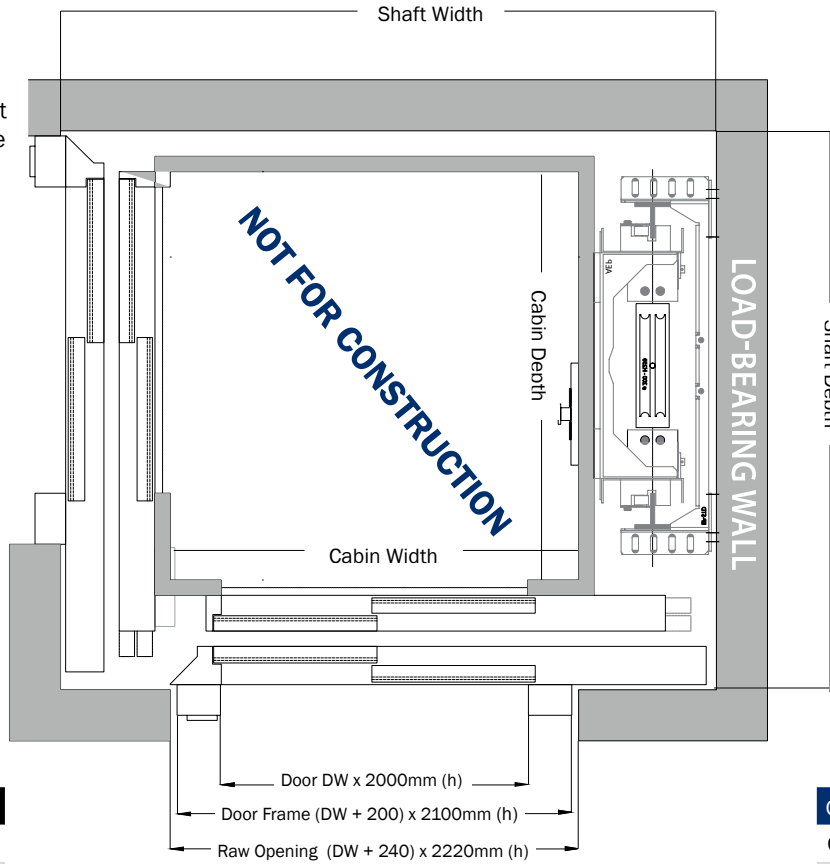

CABIN / SHAFT SIZING

| | | |
|-------------|-------|------|
| Cabin Width | + 550 | = SW |
| Cabin Depth | + 320 | = SD |

CABIN SIZE

| | Minimum | Maximum |
|-------|---------|---------|
| Width | 800 | 1200 |
| Depth | 800 | 1400 |

CABIN / SHAFT SIZING

| | | |
|-------------|-------|------|
| Cabin Width | + 600 | = SW |
| Cabin Depth | + 320 | = SD |

CABIN SIZE

| | Minimum | Maximum |
|-------|---------|---------|
| Width | 850 | 1200 |
| Depth | 850 | 1400 |

This layout drawing is for guidance only please contact our sales and design consultants to ensure your complete understanding of your lift requirements

CONSTRUCTION DETAILS

- Construction material re-inforced blockwork or equivalent
- Internal shaft size size to suit
- Pit depth 150mm - 180mm
- Headroom 2500 - 2800mm
- Power supply single phase 240V 32A or 3 phase 415V 25A
- Doors sizes from 650mm - 1000mm in 50mm increments
different jambs may have alternate impact

STANDARD SPECIFICATIONS

- Person capacity 4 - 5 persons (400kg)
- Maximum travel 12m
- Speed 0.30m/s
- Safety protection full height sensor beams
- Maximum floors 6
- Cabin fit out from our huge range of options
- Doors finishes from our huge range of options
- Compliance AS1735.16/18